

Network video camera inclusive software

Art. no. 11905 **Model name** VC-IP-SN-CAM **Version** IP-Kamera



Connections

VDE **CE** **EMC**

Technical data:

Resolution:	380 TVL (512x582 Pixel)
Minimum illumination:	0,5 Lux / F 1,4
Pick-up device:	1/3" Sharp CCD
Signal working:	Digital (DSP)
Gamma-correction:	0,45
Spectral sensitivity:	380-800nm
Signal-to-noise ratio:	>45dB
Scanning system:	PAL 625 lines/50Hz
Video output:	1Vss on 75 Ohm
Lens:	3,6mm / F2,0
Displacement:	0-325°
Neigebereich:	0-90°
Storage positions:	16
Compressions:	M-JPEG - 3 steps: very lowly, normal, high
Resolution:	640x480, 320x240, 352x288, 176x144 / 704x576 about software
Transmission cruise:	Max. 25 fps
Network connection:	Ethernet 10/100 Base T
Protocol:	TCP/IP, ARP, http, FTP, SMTP, DHCP, PPPoE, PPP
Display:	Operation: yellow Network LINK: red
Controls:	Reset
Alarm inputs:	1 reversible N.C / N.O
Alarm outputs:	2 with response time 1 to 86400 seconds
Video inputs:	1 x FBAS / 1Vss on 75 Ohm PAL/NTSC BNC plug connector
Connections:	For alarm inputs/outputs Network connection RJ-45
Measurements:	W x H x D: 149 x 145 x 145 mm
Weight:	738 g


Standard packing:

Art.no. 11905 IP camera
Power supply 12V DC for camera
CD with software

Funktionen:

- 1 video output FBAS
- 16 positions can be memorized
- 1 alarm input / 2 alarm outputs
- Alarm trigger by motion detection
- Integrated web server
- Live video transmission upto 25 FPS
- DVR function with supplied software up to 16 domes
- Alarm picture transmission via or e.mail
- P/T function
- Automatic guard tour


Network with PC-connection

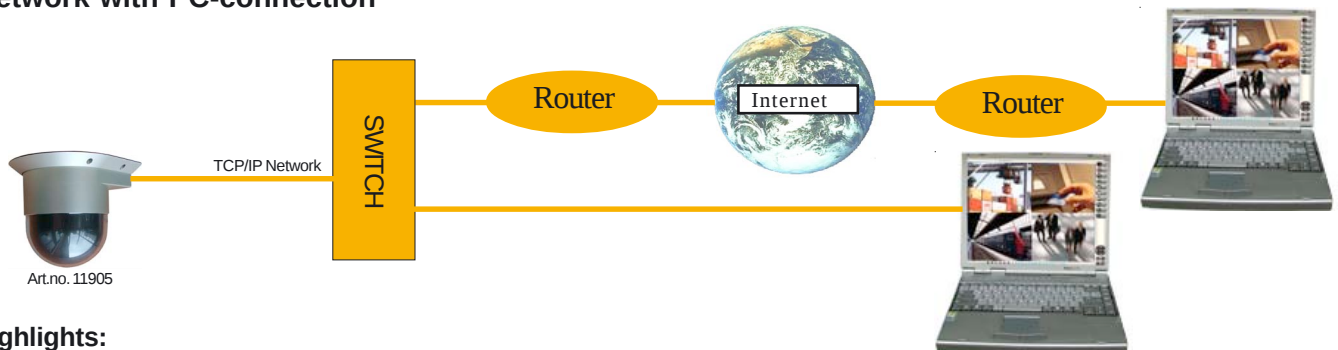

Highlights:

- Simultaneous access 16 servers/cameras
- Alarm message from the cameras
- Automatic recording in alarm situation
- P/T operation via Internet/Network

W-LAN functionality

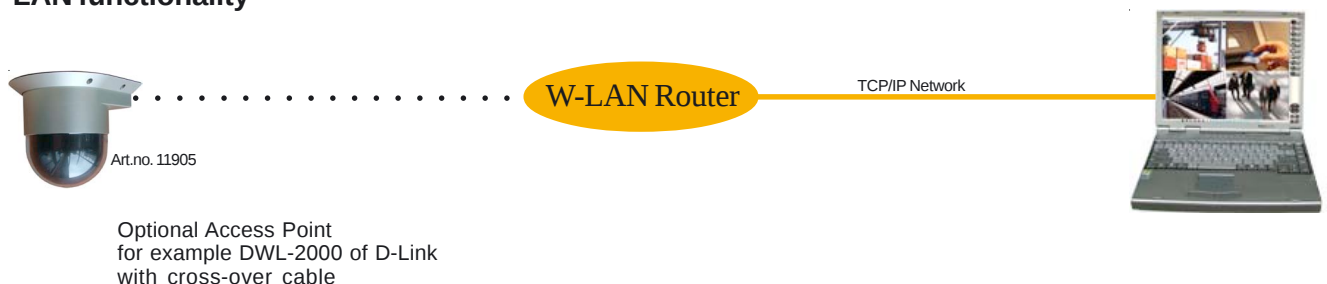

Network with local, digital bulk memory

