



Art N°: 12544-SF

Video-Streamserver 4 channel /cameras,
VGA, USB and LAN-connection, without ventilator

Functions:

- Up to 8 Videostreams simultaneously on Windows PC
- Accessible through Browser Firefox, Internet Explorer or Safari
- Live transmission of Video information in real time (25 fps speed rate)
- Control of functions with mobile devices: iPhone, iPad, Android, and Windows Mobile
- HTTP-Request Function
- Recording and Back Up function with additional Hard Disc
- USB connections for mouse or data Back though Up USB-Memory Stick

Technical Data:

HTTP-Request Function

Video signal
TV Norm
Resolution (digital)
Gray scale
Color scale
Data compression
Recording speed

Compression
Storage groups (optional)
Recording times
Recording criteria (optional)
Forward / Rewind Local (optional)
Search criteria (optional)
Programmable searching
Signal -Noise Ratio
Synchronisation
Display
Text display
Programming
Backup (optional)
MTBF
Operating Temperature
Humidity
EMF exposure CE compliance (Safety)
EMC immunity standards CE compliance (Safety)
Safety Information technologies
IP code (VDE german compliants)
Video inputs
Operating temperatur
Dimensions (WxHxD)
Weight
PC-Connection
Video output

1-25 FPS (adjustable)
CIF or 2CIF (HD1) Resolution
4 Stream channels simultaneously
CVBS 1 Vpp/75 Ohm
CCIR, PAL 625 TV Lines, 50 Fields
Display / Recording: 720 x 576 pixels
8bit 256 Scale
24bit 16 Millions of colors (8bit Y, 8bit U, 8bit V)
H.264
50 Frames per second at D1 (720x576 Pixels) Resolution
100 Frames per second at 2CIF (720x288 Pixels) Resolution
100 Frames per second at CIF (352x288 Pixels) Resolution
Distribution of the pictures per second
(manually, with alarm or Motion detection)
3 steps each channel
Ring storage
it depends on Hard Disc and compression method
Motion detection Timeline
1, 2, 3, 4, 5 time forward/rewind
Direct search, Alarm, Timeline
Date, Hour, individual alarms
> 62 dB
Internal
Full Picture, Quad
OSD
Screen Menu (OSD) for all functions
USB-Stick
80.000 Hours
5 ° to + 40° C
Till 90% (without condensing)
EN 50081-1, 55011 Class B
EN 50082-2, 50204, 61000-4
EN 60950, 60065
IP - 40 / Kl. II
4 x BNC Inputs
12V DC 25W
290 x 60 x 235 mm
2,5 kg
RJ45 Networking
1 x BNC Output or RCA output
VGA Monitor output

Included accessories

Universal Power Supply 230V AC / 12V DC, 4,2A,
1,5m Network cable
Software

Optional accessories

HDD Hard Disk (SATA) up to 2TB
Art. 12546 USB-Maus
Art. 12547 IR-Remote control

Rear Panel




Access via Smartphone



Camera live viewing:

- iPhone / iPad via Safari-Browser or App „SecuViewer“ (Quad view)
- Android Handy via Standard-Browser
- Windows Phone via Internet Explorer




Access via Network


Via Browser:

- Firefox
- Internet Explorer
- Safari

Including live stream on Website or Software .

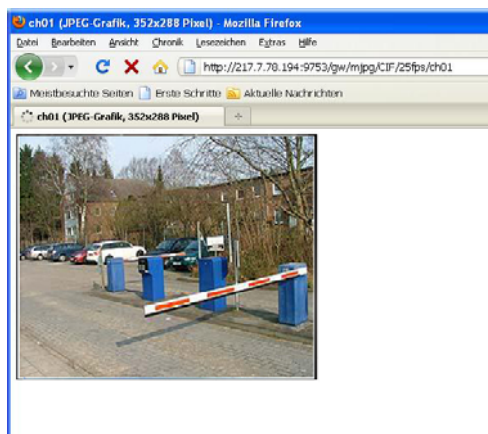

Firefox access

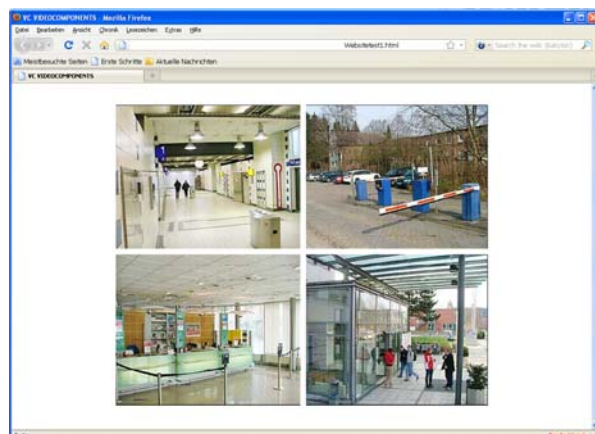

Website