



Art N°: 12566-SF

Video-Streamserver 16 channel /cameras,  
VGA, USB and LAN-connection, without ventilator

## Functions:

- Up to 16 Videostreams simultaneously on Windows PC
- Accessible through Browser Firefox, Internet Explorer or Safari
- Live transmission of Video information in real time ( 25 fps speed rate )
- Control of functions with mobile devices: iPhone, iPad, Android, and Windows Mobile
- HTTP-Request Function
- Recording and Back Up function with additional Hard Disc
- USB connections for mouse or data Back though Up USB-Memory Stick

## Technical Data:

HTTP-Request Function

Video signal  
TV Norm  
Resolution (digital)  
Gray scale  
Color scale  
Data compression  
Recording speed

Compression  
Storage groups (optional)  
Recording times  
Recording criteria (optional)  
Forward / Rewind Local (optional)  
Search criteria (optional)  
Programmable searching  
Signal -Noise Ratio  
Synchronisation  
Display  
Text display  
Programming  
Backup (optional)  
MTBF  
Operating Temperature  
Humidity  
EMF exposure CE compliance ( Safety)  
EMC immunity standards CE compliance ( Safety)  
Safety Information technologies  
IP code ( VDE german compliants )  
Video inputs  
Operating temperatur  
Dimensions (WxHxD)  
Weight  
PC-Connection  
Video output

1-25 FPS (adjustable)  
CIF or 2CIF (HD1) Resolution  
16 Stream channels simultaneously  
CVBS 1 Vpp/75 Ohm  
CCIR, PAL 625 TV Lines, 50 Fields  
Display / Recording: 720 x 576 pixels  
8bit 256 Scale  
24bit 16 Millions of colors (8bit Y, 8bit U, 8bit V)  
H.264  
50 Frames per second at D1 (720x576 Pixels) Resolution  
100 Frames per second at 2CIF (720x288 Pixels) Resolution  
100 Frames per second at CIF (352x288 Pixels) Resolution  
Distribution of the pictures per second  
(manually, with alarm or Motion detection)  
3 steps each channel  
Ring storage  
it depends on Hard Disc and compression method  
Motion detection Timeline  
1, 2, 3, 4, 5 time forward/rewind  
Direct search, Alarm, Timeline  
Date, Hour, individual alarms  
> 62 dB  
Internal  
Full Picture, Quad  
OSD  
Screen Menu (OSD) for all functions  
USB-Stick  
80.000 Hours  
5 ° to + 40° C  
Till 90% (without condensing)  
EN 50081-1, 55011 Class B  
EN 50082-2, 50204, 61000-4  
EN 60950, 60065  
IP - 40 / Kl. II  
4 x BNC Inputs  
12V DC 25W  
290 x 60 x 235 mm  
2,5 kg  
RJ45 Networking  
1 x BNC Output or RCA output  
VGA Monitor output

## Included accessories

Universal Power Supply 230V AC / 12V DC, 4,2A,  
1,5m Network cable  
Software

## Optional accessories

HDD Hard Disk (SATA) up to 2TB  
Art. 12546 USB-Maus  
Art. 12547 IR-Remote control

## Rear Panel




## Access via Smartphone



Camera live viewing:

- iPhone / iPad via Safari-Browser or App „SecuViewer“ (Quad view)
- Android Handy via Standard-Browser
- Windows Phone via Internet Explorer

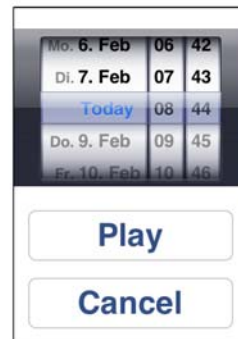


## Access via Network


Via Browser:

- Firefox
- Internet Explorer
- Safari

Including live stream on Website or Software .

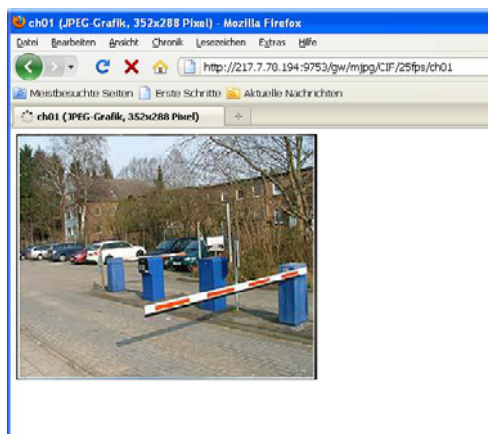

Firefox access

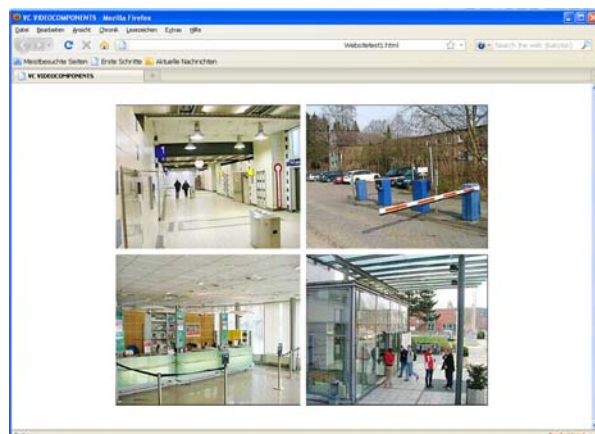

Website