

Video recorders and network components

Page 1/2

Digital video recorder with 4 video and alarm inputs incl. motion, audio, VGA and network, without hard disk

Art. no. 12760-OHR Model name VC-DVR4-MPEG-4-WAN

Art. no. 12760-HHR Model name VC-DVR4-100HDD-WAN

Art. no. 12760-CHR Model name VC-DVR4-100CD-WAN Art. no. 12760-DHR Model name VC-DVR4-100DVD-WAN

Without removable disc With HDD removable frame

With CD-RW drive With DVD-RW drive


Illustration: with CD/DVD-drive






VDE (EMC

Connection establishment

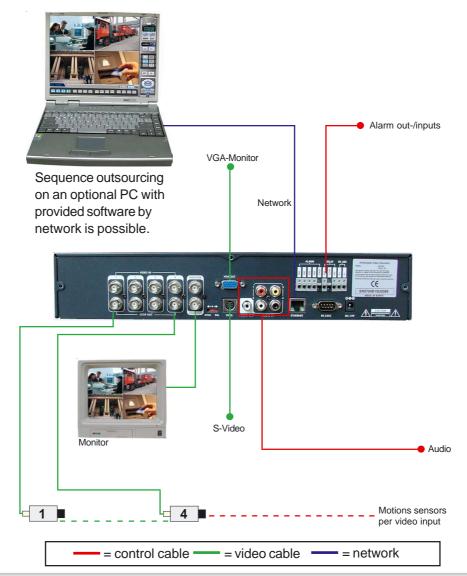







Search display of the software



Access with Internet Explorer

Record time with one 80GB hard disk in hours

Channel / FPS Resolution	Superior	High	Standard	Basic
4Channel (CIF/25FPS)	41	58	93	154
4Channel (2CIF/13FPS)	37	46	74	123
4Channel (D1/7FPS)	19	23	38	61
4Channel (D1/1FPS)	93	132	154	185

Hinweis: Die angegebenen Zeiten beziehen sich auf Daueraufnahme von hellen Objekten mit viel Bewegung, somit ist es möglich, dass Sie unter normalen Bedingungen bis zu 3-mal länger aufnehmen können.

Technical data

CPU

Operating system
Video inputs
Description speed
Description options
Recording speed

and resolution (4 cameras)

Monitor output

Compression Byte per picture

Recording options Recording schedule Motion detection Pre-alarm Audio in- outputs Alarm inputs

Alarm outputs

Interface Network

Software access Multi access

Browser assistance

Protection Backup

Search options

Search speed (local) Search options (network)

Search speed (PC) after download

Measurements (BxHxT)

32bit DSP To 3 a 750 GB S.M.A.R.T

4 PAL/NTSC with loop to outputs

max. 100 FPS

Quad, frame, switching

352 x 288 100 FPS 704 x 288 50 FPS 704 x 576 25 FPS

Basic output BNC / S-Video / VGA

Spot output BNC MPEG 4 (optimised) 3 - 5 Kb by 352 x 288 5 - 10 Kb by 704 x 288 6 - 16 Kb by 704 x 576

Continued, motion detection, alarm Weekly or everyday per camera 144 fields per camera adjustable

To 5 sec.

4 audio inputs, 1 audio outputs

4 inputs

1 x allocation of functions

Motion/disc drive alarm/alarm/alarm output

RS 485

RJ 45 TCP / IP connection

With software about LAN and/or internet (Internet Explorer)

With software by 4 x 12760-HR at the same time Internet Explorer to 4 operator at the same time

About code words 4 level

About LAN, Internet, CD-RW or USB

In time/date and event

To 64-fold vorward and reverse about Jog Shuttle

Direct search in time/date, alarm

To 200-fold vorward and reverse

435 x 60 x 410mm