


Weatherproofed camera housings

Art. No. 13519	Model name VC-ALU-HBS-230/12/24	Version Alu housing without bracket
Art. No. 14510	Model name VC-ALU-HS-230-BEIGE	Version Alu housing without bracket
Art. No. 14500	Model name VC-ALU-260	Version Alu housing without bracket
Art. No. 14520	Model name VC-ALU-260-230	Version Alu housing without bracket
Art. No. 20189	Model name VC-WAKS-10-BLACK	Version Wall mount (13519, 14500 u.14520)
Art. No. 14505	Model name VC-WAKS-10-BEIGE	Version Wall mount (14510)
Art. No. 13512	Model name VC-KS-240-OHSH	Version Plastic housing with wall mount



13519

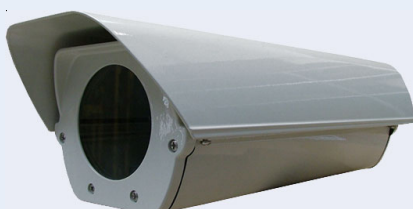

closed



opened


14510



14500 / 14520



20189



14505



13512

Technical data

Art. No.	13519	14510	14500	14520
Model name	VC-ALU-HBS-230/12/24	VC-ALU-HS-230-BEIGE	VC-ALU-260	VC-ALU-260-230
Power source / consumption	230V AC/10 watt	230V AC/10 watt	-	230V AC/10 watt
Internal heater	Yes (thermost. controlled)	Yes (thermost. controlled)	-	Yes (thermost. controlled)
Internal blower	Yes (thermost. controlled)	-	-	-
Internal voltage	230V AC/12V DC/24V AC	230V AC	-	230V AC
Environmental temperature	-30° up to + 60°C	-10° up to + 55°C	-	-10° up to +55°C
Environmental humidity	up to 95°	up to 95°	-	up to 95°
Electrical safety	EN 60065+60950	EN 60065+60950	-	EN 60065+60950
MTBF	80.000 hours	80.000 hours	-	80.000 hours
EMC	EN 50081+82, CE-certification	EN 50081+82, CE-certification	-	EN 50081+82, CE-certification
Maximum shock	80 G	80 G	80 G	80 G
Maximum vibration	8 G	8 G	8 G	8 G
Maximum weight	-	-	-	-
Field of application	Weatherproofed housing (IP66)	Weatherproofed housing (IP66)	Dustproofed housing (IP66)	Weatherproofed housing (IP66)
Place of installation	Out/Indoor	Out/Indoor	Indoor	Out/Indoor
Manner of tightening				
- Housing	2 x 6mm nuts	2 x 6mm nuts	2 x 6mm nuts	2 x 6mm nuts
- Camera	Mounting plate with oblong holes	Mounting plate with oblong holes	Mounting plate with oblong holes	Mounting plate with oblong holes
Material	Aluminium	Aluminium	Aluminium	Aluminium
Color	Aluminium anodized	Aluminium beige coated	Aluminium anodized	Aluminium anodized
Dimensions (L x W x H)				
- outdoor	380 x 100 x 110 mm	370 x 125 x 100 mm	220 x 95 x 110 mm	220 x 95 x 110 mm
- indoor	230 x 80 x 80 mm	290 x 100 x 85 mm	170 x 75 x 75 mm	150 x 75 x 75 mm
- sunroof	440 x 125 x 125 mm	410 x 140 x 115 mm	260 x 103 x 115 mm	260 x 103 x 115 mm
Weight	1800 g	1500 g	500 g	550 g

Art. No.	20189	14505	13512
Model name	VC-WAKS-10-BLACK	VC-WAKS-10-BEIGE	VC-KS-240-OHSH
Power source / consumption	-	-	-
Internal heater	-	-	-
Internal blower	-	-	-
Internal voltage	-	-	-
Environmental temperature	-	-	-10° up to +50°C
Environmental humidity	-	-	up to 95°
Electrical safety	-	-	EN 60065+60950
MTBF	-	-	80.000 hours
EMC	-	-	EN 50081+82, CE certification
Maximum shock	80 G	80 G	80 G
Maximum vibration	8 G	8 G	8 G
Maximum weight	10 Kg	10 Kg	-
Field of application	Wall mount for 13519, 14500 and 14520	Wall mount for 14510	Dustproofed housing incl. wall mount
Place of installation	Out/Indoor	Out/Indoor	Indoor
Manner of tightening			
- Housing	2 oblong holes	2 oblong holes	1 x 6mm nuts
- Camera	-	-	Mounting plate with oblong holes
Material	Metal	Metal	Plastic (ABS)
Color	Black coated	Beige coated	Beige
Dimensions (L x W x H)			
- outdoor	220 x 75 x 115 mm	220 x 75 x 115 mm	225 x 80 x 95 mm
- indoor	-	-	210 x 70 x 60 mm
- sunroof	-	-	240 x 95 x 110 mm
Weight	500 g	500 g	700 g