

Outdoor relay box with RS-485 for p/t head

Art. no. 13541-PP Model name VC-SN-ASK485-PP


Version Relay box with RS-485



VDE CE EMC

Technical data

	Funktion:	Relay box with RS-485 for p/t head and motor zoom lenses control
	Connection:	RS-485 BUS (2 wires)
	Signal:	RS-485 up to 1000m distance
	Protocol:	Pelco-P, 4800 Baut
Ports	RS-485:	Screw clamp
	Input voltage:	230V AC
	Output voltage:	24V AC or 230V AC for a corresponding p/t head
	Weight	2,0 kg
Environment	Working temperature	-10°C ~ 50°C
	Protection class	IP67
Measurements	Housing (BxHxL)	Plastic (IP67) 265 x 95 x 210 mm

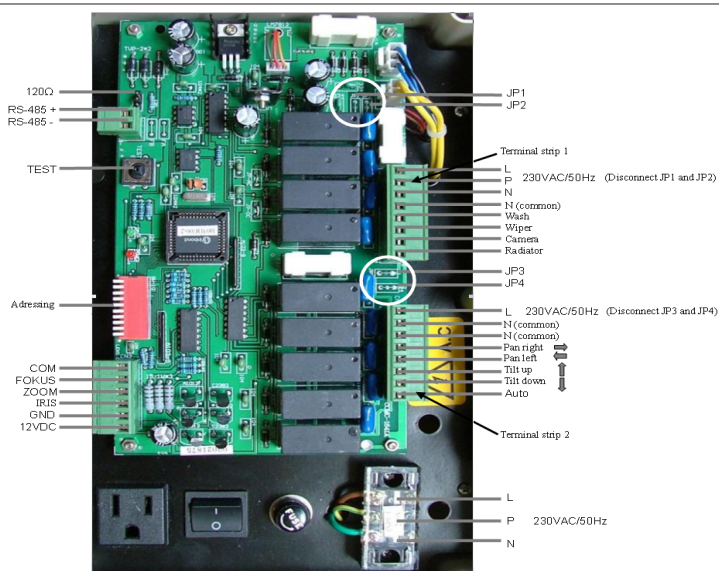

Attention:

Delivery version 24V AC operation.

P/T heads 230V AC please remove with JP1, JP2, JP3 and JP4 as otherwise the relay box would be damaged!