

Water proofed system cable (IP68) for video, audio and power supply

Art. no. 14034	Model name VC-CW3-15	15m system cable 3mm Ø max. 50m distance
Art. no. 14036	Model name VC-CW3-24	24m system cable 3mm Ø max. 50m distance
Art. no. 14037	Model name VC-CW3-50	50m system cable 3mm Ø max. 50m distance
Art. no. 14038	Model name VC-CW55-15	15m system cable 5,5mm Ø max. 200m distance
Art. no. 14039	Model name VC-CW55-24	24m system cable 5,5mm Ø max. 200m distance
Art. no. 14052	Model name VC-CW55-50	50m system cable 5,5mm Ø max. 200m distance



**VC-Products
mean
high quality
and
reliability
with
German
engineering
and
design**

Technical datas

Electric charge:	2,5 A/100m
Threshold voltage:	100V
Test voltage:	AC 0.5 KV / 1 min.
Destructions voltage:	AC 1KV / 1 min.
Ohm resistor:	75 Ohm
Isolations value:	5 Mohm / km / 20° C
Tensile strength from Dielectric:	1 kg / 1 min.
Max. cable temperature for 1 hour:	+60° C
Ambient temperature:	-20° C to + 80° C
Minimum tolerated radius:	20mm
Max. demand of the cable:	0,5 kg / mm
Middle resistance about:	oil, water, detergent and UV light

4 pin Mini DIN plug and socket seizure from system cable




3 cable lengths: 15m, 24m and 50m
with 4 pin mini DIN socket and plug
and in two cross-sections (3mm and
5,5mm Ø)


**For connection
to monitor**

**For connection
to camera**

Mini DIN plug 4 pin

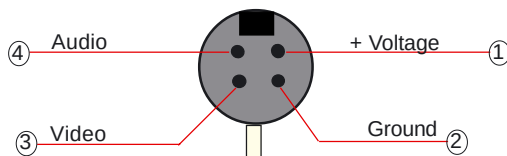

Mini DIN Socket 4 pin

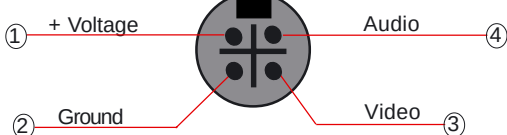

15m
24m
or
50m