


1/3" weather proofing antivandalism minidome b/w cameras (IP65)

Art. no. 14043	Model name	VC-VMID-UP	Version	420TVL flush-mounting housing
Art. no. 14053	Model name	VC-VMID-UPHR	Version	600TVL flush-mounting housing
Art. no. 14044	Model name	VC-VMID-AP	Version	420TVL surface housing
Art. no. 14054	Model name	VC-VMID-APHR	Version	600TVL surface housing
Art. no. 14057	Model name	VC-WD-VMID	Version	Wall bracket for surface version
Art. no. 14058	Model name	VC-DH-VMID	Version	Ceiling bracket for surface version

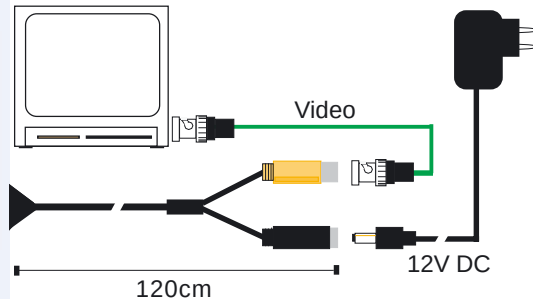

Standard packing:

b/w minidome camera with 4,3mm lens and 1,2m connection cable equipped with: DC plug and BNC socket for video

Accessories:


Stabilized power supply 12V DC/400mA (art.no. 20114)

VDE CE EMC

Technical data


Minimum illumination:	0,05 Lux / F 1,4
Pick-up device:	1/3" CCD-Chip Sharp
Spectral sensitivity:	380 to 1100 nm wave length
Enhancer:	Horizontal
Gamma-correction:	0,45
Knee function:	yes, for edge enhancement
Signal to noise-ratio:	> 50 dB
AGC:	Yes
Synchronisation:	Internal
Electr. Shutter:	1/50 - 1/100000 sec. (auto)
Backlight compensation:	Yes, auto BLC
Smearing effect:	0,004%
LAG:	Zero
Scanning system:	CCIR, 625 lines, 50 Hz
Video output:	BAS 1 Vpp / 75 Ohm
Power source / consumption:	12 (9-15) V DC, 0,1 A (reverse battery protection)
Environmental temperature:	-10 up to +50 °C
Environmental humidity:	Up to 95%
Electrical safety:	EN 60065+60950
EMC:	EN 50081+82, CE-Zertifikation
Maximum vibration:	8 G
Mounting attachments:	4x4 bore hole
Lens:	4,3 mm/ F 2,0 (58° horizontal)
Iris:	Fixed
Focussing:	Fixed
Focus area:	(0,5m bis ∞)
Connection:(Video,Spg.)	Video connection cable 1,2m with BNC socket and 12V DC power plug
Compatible accessories:	Stabilized power supply 12V DC / 400 mA art.no.20114

Spectral sensitivity of camera CCD-Chip

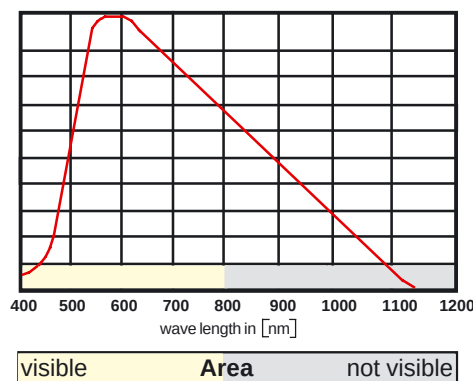


Measurements

surface version
Weight: 300g



flush mounting version
Weight: 250g



ceiling bracket
Weight: 800g



wall bracket
Weight: 500g

