


1/3" weather proofing antivandalism minidome color cameras (IP65)

Art. no. 14045	Model name	VC-FVMID-UP	Version	380TVL flush-mounting housing
Art. no. 14055	Model name	VC-FVMID-UPHR	Version	480TVL flush-mounting housing
Art. no. 14046	Model name	VC-FVMID-AP	Version	380TVL surface housing
Art. no. 14056	Model name	VC-FVMID-APHR	Version	480TVL surface housing
Art. no. 14057	Model name	VC-WD-VMID	Version	Wall bracket for surface version
Art. no. 14058	Model name	VC-DH-VMID	Version	Ceiling bracket for surface version

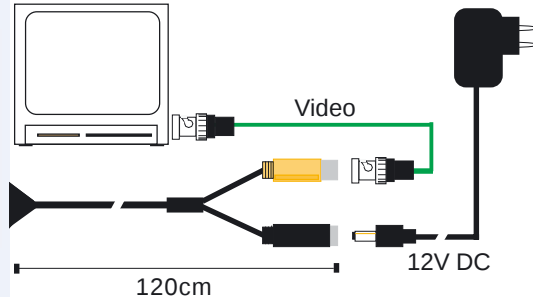

Standard packing:
color minidome camera
with 4,3mm lens and
1,2m connection cable
equipped with: DC plug and
BNC socket for video


Accessories:
Stabilized power supply
12V DC/400mA (art.no. 20114)

VDE CE EMC

Technical data


Minimum illumination:	0,5 Lux / F 1,4
Pick-up device:(14045,14046)	1/3" CCD-Chip Sharp
(14055,14056)	1/3" CCD-Chip Sony Super HAD
Automatic white balance:	2100°-8200°K
Enhancer:	Horizontal and vertical
Gamma-correction:	0,45
Knee function:	yes, for edge enhancement
Signal to noise-ratio:	> 50 dB
AGC:	Yes
Synchronisation:	Internal
Electr. Shutter:	1/50 - 1/100000 sec. (auto)
Backlight compensation:	Yes, auto BLC
Smearing effect:	0,004%
LAG:	Zero
Scanning system:	PAL, 625 lines, 50 Hz
Video output:	FBAS 1 Vpp / 75 Ohm
Power source / consumption:	12 (9-15) V DC, 0,1 A (reverse battery protection)
Environmental temperature:	-10 up to +50 °C
Environmental humidity:	Up to 95%
Electrical safety:	EN 60065+60950
EMC:	EN 50081+82, CE-Zertifikation
Maximum vibration:	8 G
Mounting attachments:	4x4 bore hole
Lens:	4,3 mm/ F 2,0 (58° horizontal)
Iris:	Fixed
Focussing:	Fixed
Focus area:	(0,5m bis ∞)
Connection:(Video,Spg.)	Video connection cable 1,2m with BNC socket and 12V DC power plug
Compatible accessories:	Stabilized power supply 12V DC / 400 mA art.no.20114

Spectral sensitivity of camera CCD-Chip

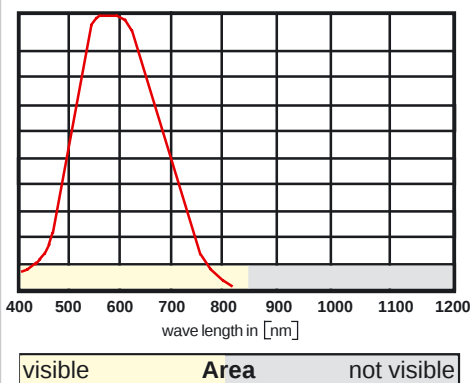


Measurements

surface version
Weight: 300g



flush mounting
version
Weight: 250g



ceiling bracket
Weight: 800g



wall bracket
Weight: 500g

