

Vandalism proofed dome camera housing

Art. no. 14093	Model name VC-VKUP90R-D	Version for 42 x 42 mm board camera
Art. no. 14098	Model name VC-KUP90R-PLATTE	Version 125mm Ø assembly plate for art.no. 14093
Art. no. 14094	Model name VC-VKUP90U-D	Version for 42 x 42 mm board camera
Art. no. 14095	Model name VC-VKUP90A-D	Version for 42 x 42 mm board camera
Art. no. 14090	Model name VC-KUP90-PLA160	Version 160mm Ø assembly plate for art.no. 14094

Technical data

Art.no.	14093	14094	14095
Impact resistant Housing	Plastics	Alu diecasting	Alu diecasting
Surface version	Surface version	Flush mounting vers.	Surface version
Ceilings mounting	Indoor/outdoor	Indoor/outdoor	Indoor/outdoor
Mounting parts	4 hole	4 hole	4 hole
Internal heater	no	no	no
Power temperature	-20° up to + 50°C	-20° up to + 50°C	-20° up to +50°C
Air humidity	to 95°	to 95°	to 95°
Electrical safety	60065+60950 cl. 3	60065+60950 cl.3	60065+60950 cl.3
VDE			
MTBF	80.000 hours	80.000 hours	80.000 hours
EMC	EN 50081+82, CE certification	EN 50081+82, CE certification	EN 50081+82, CE certification
Max. shock	80 G	80 G	80 G
Max. vibration	8 G	8 G	8 G
Category of usage	guard housing	guard housing	guard housing
Camera bracket for	42x42mm board cam.	42x42mm board camera	42x42mm board camera
Color	white/black	beige	beige
Weight	250 g	800 g	800 g
Accessories	Bore template	Bore template	Bore template
		Vacuum sealed	Vacuum sealed
		1m BNC / DC	1m BNC / DC
		Connection cable	Connection cable



Art.no.:
14093



Art.no.:
14094




Art.no.:
14095




Art.no.:
14090 and
14098

VDE CE EMC

Assembly example for suspended ceilings

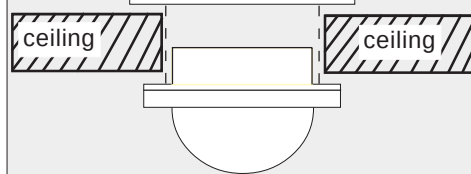

125mm Ø assembly plate for suspended ceilings

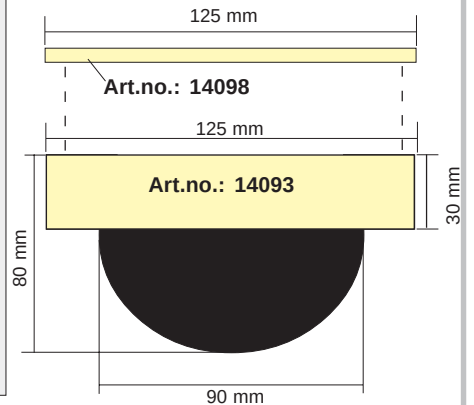

160mm Ø assembly plate for suspended ceilings

