

## Universal keypad with integrated RS-485 interface

Art. No. 14215 Model name VC-CON-SP64

Version 64 adresses / RS-485

### Controls



- ① 2 line display for communication with selected devices (speed dome, camera, relay box)
- ② Selection button cameras
- ③ System programming button
- ④ Selection button - brightness, focus, zoom
- ⑤ Joystick (2 axial)

### Technical Data

Operation via controller of:

Speed dome camera: all functions  
OSD camera: all functions  
Motor zoom lens camera: all functions  
Max. 64 devices  
RS485 up to 1000m distance

Connections:  
Signal

Ports

Power  
RS-485  
Input voltage  
Capacity  
Electrical safety  
Weight

DC mini socket, screw clamp  
Screw clamp  
12 V DC  
5W  
EN 60065+60950 , EN 50081+82  
1,7 kg


VDE CE EMC

### Measurements

W: 190 mm  
H: 61 mm  
D: 140 mm

Environments

Operating temp. 0°C ~ 50°C  
Humidity 10%~90% RH, not condensing  
Supplied accessories Power supply 12V DC

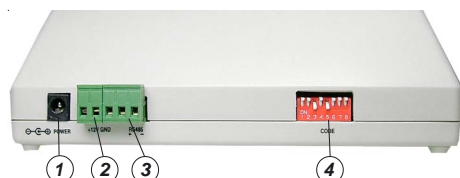

- ① 12V DC Socket
- ② 12V DC Screw clamp
- ③ RS-485 Screw clamp
- ④ Protocol adjustment about DIP switch (Multi protocol)