


Telemetry matrix with up to 64 inputs

Art. no. 14362-A

Model name VC-MTX8600+CPU/2HE

Version Matrix box, 19" / 2HE

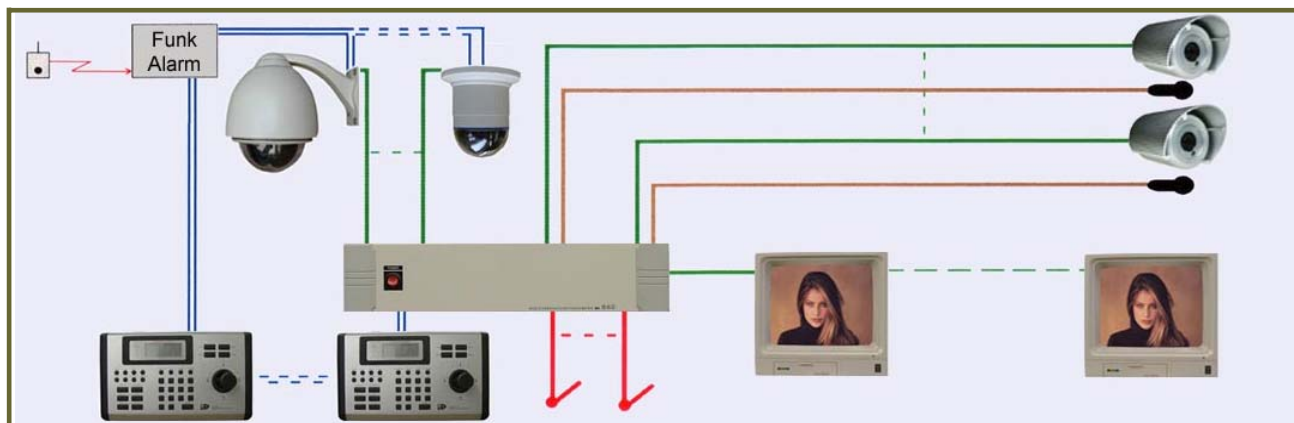

Employment:	Microprocessor controlled display matrix switch 64/16
Video in-/outputs:	Max. 64/16
Audio inputs:	Max. 64
Audio outputs:	Max. 16
Video signal switching:	Remote console (RS-485) / alarm input
Alarm inputs:	Up to 64 potentialfree controlled and RS-485
Remote control:	RS-485 interface
Bandwidth:	12 MHz (- 3dB)
Crosstalk attenuation:	48dB
Signal to noise ratio:	50dB
Scanning system:	CCIR, 625 lines, 50HZ (F)BAS
Video in-/outputsignal:	1Vss/75
Power source/consumption:	230V AC / 50 W
Environmental temperature:	-10°bis +50°C
Environmental humidity:	95%
Weight:	7kg
Safety class	IP40/KI. III
Dimensions (BxHxT):	444 x 95 x 270mm
Connections:	
- Video in-/outputs:	BNC-socket
- Alarm in-/outputs:	25pol. D-Sub-socket
- Remote control connection:	RJ11 connector