


Keypad with RS-485 - BUS

Art. no. 14375

Model name VC-SYS-MULTI

Version multi protocol

Controls

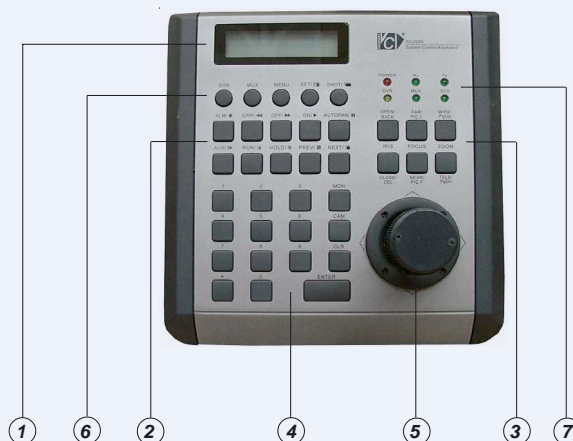

- ① 4-digit digital display indicating the accessed equipment (Speed-Dome, camera, monitor, conduit box, dvr)
- ② Functional keys for camera, multiplexer, DVR and crossbar
- ③ Lens control (zoom, focus, iris)
- ④ Button for selecting cameras, monitors and alarm
- ⑤ Joystick (3 axial)
- ⑥ Programming menu
- ⑦ LED display

VDE CE EMC

Technical Data

Communication

Interface

Integrated protocols: Camera

Digital recorder

Multiplexer

Telemetry video matrix

P/T heads

Display

Controls of dome

Console

Alarm masking / 2 transmission

Programming

MTBF

Environmental temperature

Environmental humidity

Electrical safety (VDE)

RS-485 connection

Power source / consumption

Measurements (BxTxH)

Weight

Color

Compatible VC aticle: Camera

Digital recorder

Multiplexer

Telemetry video matrix

P/T heads

RS-485

VC, Pelco, Panasonic, Samsung and DSCP

VC, Bosch, Sony and Pelco

VC, Pelco, Robot, Bosch and Sony

VC

VC, Pelco, Panasonic, Samsung and DSCP

LCD with background illumination

3 axial joystick, button

Not controlling plastic button VR

LCD about RS-485

Cameras, crossbar, multiplexer and DVR

80.000 hours

0° C - 50° C

To 95% (without condensation)

I P-40 / Kl.II

Screw clamp

12V DC / 5 W

190mm x 209mm x 109mm

1,5 kg

Silver / black

14208, 14223, 13815, 13825, 14202, 14212, 14200, 14214,

14235, 14216, 14217, 14218, 14219, 14245

13186

20147-Z, 20235-Z

14306, 14362, 14310

14380, 14385, 20624-PP, 20602



RS-485 / to 1200m

12V DC / 0,4A

Connection:

RS-485 screw clamp