

Waterproofed camera protection housing

Art. no. 14510	Model name VC-ALU-HS-230-BEIGE	Version Alu housing / heating / 230V AC
Art. no. 14510-12	Model name VC-ALU-HS-12/230-BEIGE	Version Alu housing / heating / 230V AC / 12V DC
Art. no. 14540	Model name VC-ALU-HS-230-BEIGE/IK	Version Alu / internal cable direction / heating / 230VAC
Art. no. 14540-12	Model name VC-ALU-HS-12/230-BEIGE/IK	Version Alu / internal cable dir. / heating / 230VAC/12VDC
Art. no. 13512	Model name VC-KS-240-OHSH	Version Plastics housing with rack
Art. no. 14505-H	Model name VC-WAKS-10-BEIGE	Version Wall rack for art.no. 14510
Art. no. 14535-H	Model name VC-WAKS-10-BEIGE/IK	Version Wall rack for art.no. 14540



closed


14510/14540
14510-12/14540-12



open



13512

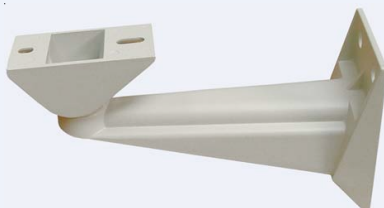

14505-H



14535-H

Technical datas

Art.no.	14540	14510	13512
Model name	VC-ALU-HS-230-BEIGE/IK	VC-ALU-HS-230-BEIGE	VC-KS-240-OHSH
Power source/ consumption	230V AC/10 Watt	230V AC/10 Watt	-
Internal heating	Yes (thermost. regulated)	Yes (thermost. regulated)	-
Internal voltage	230V AC	230V AC	-
Specialty	Internal cabel direction	-	-
Environmental temperature	-20° up to + 55°C	-20° up to + 55°C	-10° up to +50°C
Environmental humidity	to 95°	to 95°	to 95°
Electrical safety VDE	60065+60950	60065+60950	60065+60950
MTBF	80.000 hours	80.000 hours	80.000 hours
EMC	EN 50081+82, CE-certification	EN 50081+82, CE-certification	EN 50081+82, CE-certification
Usage category	Weather protection housing (IP66)	Weather protection housing (IP66)	Dust protection housing incl. Wall mounting
Mounting place	Outdoor/indoor	Outdoor/indoor	Indoor
Specific features	Internal cabel direction	-	-
Fastening types			
- Housing	6 x 6mm screw thread	2 x 6mm nuts	1 x 6mm nuts
- Camera	Montage plate with Slot	Montage plate with Slot	Montage plate with Slot
Material	Aluminium	Aluminium	Plastics (ABS)
Color	Aluminium beige coated	Aluminium beige coated	Beige
Measurements (L x B x H)			
- outdoor	370 x 125 x 100 mm	370 x 125 x 100 mm	225 x 80 x 95 mm
- indoor	290 x 100 x 85 mm	290 x 100 x 85 mm	210 x 70 x 60 mm
- with sun protection roof	410 x 140 x 115 mm	410 x 140 x 115 mm	240 x 95 x 110 mm
Weight	1500 g	1500 g	700 g

Art.no.	14505-H	20535-H
Model name	VC-WAKS-10-BEIGE	VC-WAKS-10-BEIGE/IK
Power source/ consumption	-	-
Internal heating	-	-
Internal voltage	-	-
Specialty	-	Internal cable direction
Environmental temperature	-	-
Environmental humidity	-	-
Electrical safety VDE	-	-
MTBF	-	-
EMC	-	-
Max. demand	10 Kg	10 Kg
Usage category	Wall bracket for 14510 and 14510-12	Wall bracket for 14540 and 14540-12
Mounting place	Outdoor/indoor	Outdoor/indoor
Fastening types		
- Housing	2 slots	2 slots
Material	Metall	Metall
Color	Beige coated	Beige coated
Measurements (L x B x H)	220 x 75 x 115 mm	220 x 75 x 115 mm
Weight	500 g	500 g