


1/3" Color dome camera (480TVL) with 90mm Ø dome glass

Art. no. 15155

Model name VC-FKUP-480-4/9

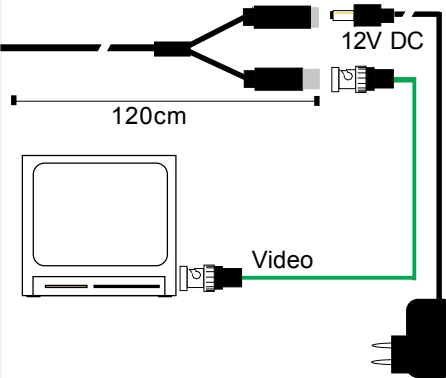

Standard packing:

Dome camera with 16mm lens and 1,2m connection cable equipped with:
DC plug and video BNC socket

Necessary accessories:


stabilized power supply art.no. 20114

Technical datas

Horizontal resolution:	480 lines (752 x 582 pixel)
Minimum illumination:	0,5 Lux at F 1,4
Pick-up device:	1/3" Sony Super HAD-Chip
Automatic white balance:	2800-8200°K
Enhancer:	Horizontal and vertical
Gamma-correction:	0,45
Knee function:	For edge enhancement
Signal-to-noise ratio:	> 45 dB
AGC / ALC:	28 dB / 72 dB
Synchronisation:	Internal
Automatic electrical shutter:	1/50 - 1/100000 sec.
Intelligent backlight compensation:	Auto backlight
Smeareffect:	0,004%
LAG:	Zero
Scanning system:	PAL, 625 lines, 50 Hz
Video output:	FBAS, 1 Vpp / 75 ohm
Power source / consumption:	9-15V DC / 0,1 A
Environmental temperature:	-10 to +50 °C
Environmental humidity:	Up to 90%
Maximum shock:	80 G
Maximum vibration:	8 G
Weight:	230g
Lens:	4-9mm vario
Lens mount:	12mm thread
Iris:	Manual vario 30-62° horizontal
Focussing:	Manual (0,5m up to unlimited)

VDE **CE** **EMC**

Spectral sensitivity of camera CCD-Chip

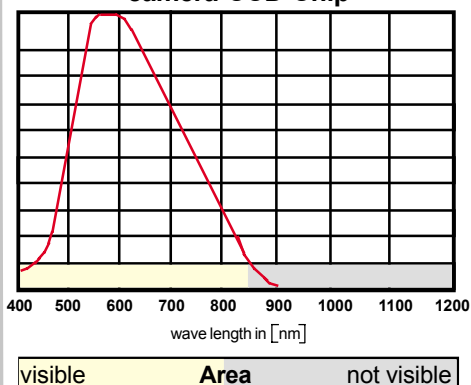

Measurements



With board camera and DC vario lens

