


PCI capture cards and accessories

Art. no. 15200	Model name	VC-PC-PCI-16/25-A	Art. no. 15235	Model name	VC-PC-PCI-8AL
Art. no. 15205	Model name	VC-PC-PCI-16/50-A	Art. no. 15240	Model name	VC-PC-PCI-4V
Art. no. 15210	Model name	VC-PC-PCI-16/100-A	Art. no. 15241	Model name	VC-PC-PCI-4A
Art. no. 15220	Model name	VC-PC-PCI-16/200-A	Art. no. 15242	Model name	VC-PC-PCI-8V
Art. no. 15230	Model name	VC-PC-PCI-16/400-A	Art. no. 15243	Model name	VC-PC-PCI-8A



VDE CE EMC

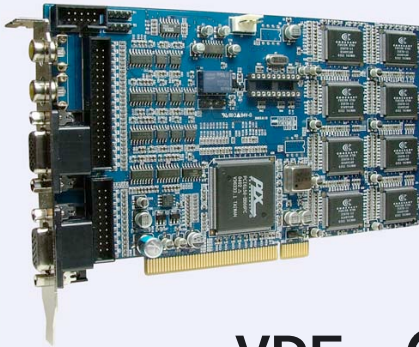

Art.no. 15240



Art.no. 15241



Art.no. 15243




Art.no. 15242




Main display (live video)



Search display local

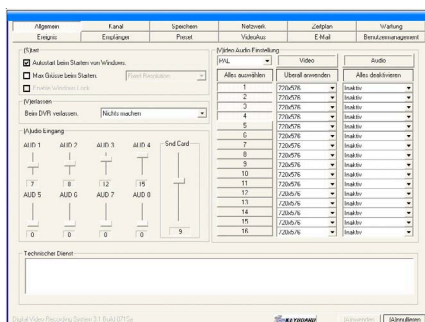

Adjustments display local

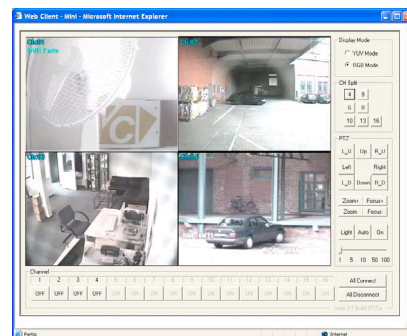

Access via webbrowser



Access via client software live display



Access via client software search display

Technical data

TV norm :	PAL 625 lines
Resolution :	360 x 288, 720 x 576 pixel
Video output :	1 x frame by alarm or frames in sequenz modus
Color :	16 Mio 24 bit (8bit Y, 8bit U, 8bit V)
Compression :	MPEG Formula codec (H.263)
Operating system :	Windows XP, Windows 2000
Watchdog :	Yes, available additional Reboot via time concept
Pictures / sec. :	Per model 25,50,100 or 200 FPS
Search function :	Via event, time or alarms
Extended search function :	Smart Search additional in the records of motion
Alarm inputs :	Optional with alarm in/output board art. no. 15235 VC-PC-PCI-8AL per 8 alarm inputs necessary
Remote access options	Via software or Internet Explorer
Motion detection :	10 fields arbitrary value, sensitivity adjustable per camera
Time concept :	Weeks time concept for all cameras disconnected adjustable
RS-485 (PTZ) :	RS-485 connection to control of dome cameras or p/t heads
Auto preset start	Preset Position can be selected step by step Dwelling time for each PP can be adjusted separably
User management :	30 different user with different access levels can be created The following reservations / authorisations are possible: - access at cameras each one adjustable - access at settings - use the p/t zoom function - access at search functions - access at record function - access at storage - access at user management - access per network
Backup :	Via software backup manager also backup at AVI function
Zoom function:	4-fold by zoom
Popup function	Popup by motion detection
Video inputs :	4/8/12 or 16
Groups :	Administration from groups to the access to different servers.

The PCI cards feature 16 video inputs, they will be supplied without video / audio cable.
The video / audio cable to be ordered separably.

Video connection cable:	
Art.: 15240 VC-PC-PCI-4V	4 port video connection cable
Art.: 15242 VC-PC-PCI-8A	8 port video connection cable

Audio connection cable:	
Art.: 15241 VC-PC-PCI-4A	4 port audio connection cable
Art.: 15243 VC-PC-PCI-8V	8 port audio connection cable

Alarm in- and output board:	
Art.: 15235 VC-PC-PCI-8AL	8 port alarm board