

Video components....

Designed for professional video systems




Art: 15308-Z

Technical data

Resolution:.....	580TVL (795x582 pixel) (color) 700TVL (795x582 pixel) (b/w)
Minimum illumination:.....	0,1 Lux / F 1,4 (color) 0,01 Lux / F 1,4 (b/w) 0,0001 Lux with FIT
Pick-up device:.....	1/3" Sony Super HADII CCD-Chip
Signal working:.....	Digital (SSNRII)
Spectral sensitivity:.....	380-800nm wave length (color) 380-1100nm wave length (b/w)
OSD-Menue:.....	Continuous auto iris control, shutter, auto white balance, backlight, AGC, 3-fold digital noise reduction (DNR), frame integration (FIT) to 256-fold, text display, motion detection (Motion), privacy zones (masking), mirror pictures and continuous back focal adjustment
Interface:.....	RS-485 (Pelco-D)
Alarm output:.....	Yes (TTL)
Signal-to-noise ratio:.....	>50 dB (AGC off)
Synchronisation:.....	Internal
Electr. shutter:.....	1/50 - 1/90000 sec.
Smeareffect:.....	0,004%
LAG:.....	Zero
Scanning system:.....	PAL, 625 lines, 50 Hz
Video output:.....	FBAS 1 Vss / 75 Ohm
Power source / consumption:.....	12 V DC, 0,2A
Environmental temperature:.....	-10 up to +55 °C
Environmental humidity:.....	Up to 90%
Electrical safety VDE:.....	EN 60065+60950
EMC:.....	EN 50081+82, CE certification
Maximum vibration.....	8 G
Mounting attachments:.....	1/4" thread
Weight:.....	300g
Dimension (WxHxD):.....	62 x 62 x 125mm
Lens:.....	CS-Mount and C-Mount Adapter
OSD programming:.....	Button on the camera back side

VDE CE EMC

Spectral sensitivity of camera
CCD-Chip

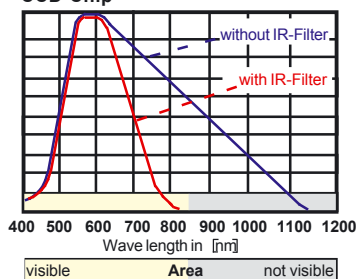

Back view



Scope of delivery:

OSD day/night camera
C/CS Mount Adapter
4pin lens connector
Interfaces connection cable

Recommended accessories:

Stabilized power supplied 12V DC / 1,3 A
(art.no. 20114-S)
All lenses, mountings and protection housing