

Video components....

Designed for professional video systems



Art: 15309-Z


Technical data

Resolution:.....	550TVL (752x582 pixel) (color) 600TVL (752x582 pixel) (b/w)
Minimum illumination:.....	0,5 Lux / F 1,4 (color) 0,05 Lux / F 1,4 (b/w)
Pick-up device:.....	1/3" Sony Super HAD CCD-Chip
Signal working:.....	Digital (DSP)
Spectral sensitivity:.....	380-800nm wave length (color) 380-1100nm wave length (b/w)
OSD-Menue:.....	Continuous auto iris control, manual shutter, auto white balance, 3-fold backlight, 2-fold AGC, 3-fold digital noise reduction (DNR), frame integration (FIT) to 128-fold, text display, 4x motion detection (Motion), 4x privacy zones (masking), mirror pictures and continuous back focal adjustment
Interface:.....	RS-232 (optional)
Signal-to-noise ratio:.....	>50 dB (AGC off)
Synchronisation:.....	Internal
Electr. shutter:.....	1/50 - 1/120000 sec.
Smeareffect:.....	0,004%
LAG:.....	Zero
Scanning system:.....	PAL, 625 lines, 50 Hz
Video output:.....	FBAS 1 Vss / 75 Ohm
Power source / consumption:.....	230V AC, 3W
Environmental temperature:.....	-10 up to +55 °C
Environmental humidity:.....	Up to 90%
Electrical safety VDE:.....	EN 60065+60950
EMC:.....	EN 50081+82, CE certification
Maximum vibration:.....	8 G
Mounting attachments:.....	1/4" thread
Weight:.....	400g
Dimension (WxHxD):.....	62 x 62 x 125mm
Lens:.....	CS-Mount and C-Mount Adapter
OSD programming:.....	Button on the camera back side

VDE CE EMC

Spectral sensitivity of camera

CCD-Chip

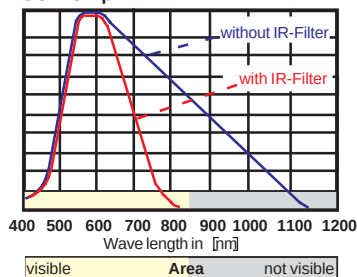

Back view



Scope of delivery:

OSD day/night camera with 4,3mm
C/CS Mount Adapter
4pin lens connector
Interfaces connection cable

Recommended accessories:

Stabilized power supplied 12V DC / 1,3 A
(art.no. 20114S)
All lenses, mountings and protection housing