

Weatherproofed 1/3" LED day/night color cylinder camera with OSD menu, FIT, DNR, Motion, privat zones and 24 LED's in alu housing (IP65) incl. DC vario lens, mount and sunroof

Art. no. 15330-RM Model name VC-24LED-FCYW-TN3/6OSD

Version 540TVL 2,6-6mm DC vario lens

Art. no. 15311 Model name VC-OSD-Keypad

Version Remote control for 15330-RM




VDE CE EMC

**VC-Products
mean
high quality
and
reliability
with
German
engineering
and
design**

Technical data

Special functions:	Hidden control by 0 lux up to 30 m distance via 24 IR LED's
Resolution:	540 tv lines (795 x 596 pixel) (color)
Minimum illumination:	3,0 Lux / F 1,4 (color) 0 Lux with IR-LED illumination (b/w)
Pick-up device:	1/3" CCD-Chip Sony Super HAD
Signal working:	Digital (DSP)
Spectral sensitivity:	380 - 1100nm wave length
Focal length focus adjustment:	Adjustable (external)
Gamma-correction:	0,45
Signal-to-noise ratio:	> 48 dB (AGC out)
AGC:	Max. 26 dB
FIT (slow shutter):	To 128-fold (adjustable)
OSD menu settings:	Continuous shutter, white balance, 3-fold backlight, 3-fold AGC, 3-fold DNR, FIT to 128-fold, words display, 4 x motion, 4 x privat zones area, mirror image and continuous focus adjustment
Synchronisation:	Internal
Electrical shutter:	1/50 - 1/120000 sec.
Smeareffect:	0,004%
LAG:	Zero
Scanning system:	PAL, 625 lines, 50 Hz
Video output:	FBAS, 1 Vpp 75 ohm
Power source / consumption:	12V DC / 0,4 A
Environmental temperature:	-20 up to +50°C
Environmental humidity:	Up to 95%
Electrical safety VDE:	EN 60065+60950
EMC:	EN 50081+82, CE-certification
Maximum vibration:	8 G
Housing:	Alu (IP65)
Weight:	650 g
Lens:	2,6-6mm DC vario (43-86° horizontal)
Shutter control:	DC regulated
Focussing:	Manual (0,5m to ∞)
Connections:	1,8m connection cable with BNC and 12V DC plug for the OSD keypad
Mounting attachments:	Wall / ceiling mount
Suitable accessories:	Stabilized plug-in power supply 12V DC / 1,3A (Art.no. 20114S) OSD keypad (Art.no. 15311) for programming

Spectral sensitivity of camera CCD-Chip

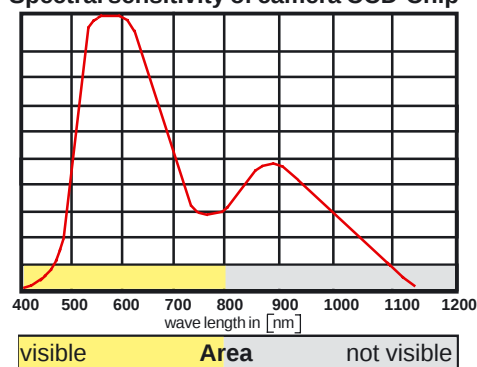


Art.no. 15311



With our keypad you can program the cylinder camera individually.

Dimensions:

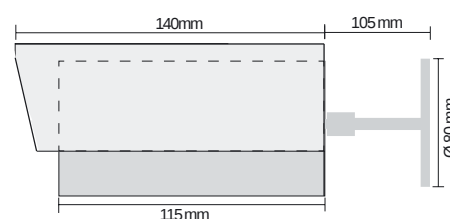

The camera is supplied with a wall/ ceiling mount in all directions. Thus it enables one to mount the camera even in difficult locations for example roof slopes, roof pitch