

Video components....

Designed for professional video system




Art: 15343-IR

1/3" LED day/night IR dome camera with vario lens

Technical data

Special funktion:	Hidden surveillance at 0 Lux up to 20m with 24 IR-LED's (light reddish visible wave range of 850nm)
Resolution:	520TVL (752 x 582 pixel) (color)
Minimum illumination:	3 Lux / F 1,4 (color) 0 Lux with IR LED illumination (b/w)
Pick-up device:	1/3" Sony Super HAD CCD-Chip
Signalverarbeitung:	Digital (DSP)
Spectral sensitivity:	380 bis 1100nm wave length
Gamma-correction:	0,45
Knee function:	For edge enhancement
Signal-to-noise ratio:	> 48 dB
Synchronisation:	Internal
Elektr. Shutter:	1/50 - 1/120000 sec.
Intelligent backlight compensation:	Auto Backlight
Smeareffect:	0,004%
LAG:	Zero
Scanning system:	PAL, 625 lines, 50 Hz
Video output:	FBAS 1 Vss / 75 Ohm
Power source / consumption:	12V DC, 0,3 A (Reverse Battery Protection)
Environmental temperature:	-20 up to +50°C
Environmental humidity:	To 95%
Electrical safety VDE:	EN 60065+60950
Housing:	IP65 Aluminium
Weight:	650 g
Lens:	2,8-11mm manual vario (25-82° horizontal) (outside adjustable)
Iris:	Fixed
Connection: (Video, Spg.):	1,8m connection cable with BNC socket and 12V DC connector
Montage:	Wall / ceiling holder
Accessories:	Stab. power supplied 12VDC/1,3A (art.no. 20114S)

Spectral sensitivity of camera CCD-Chip

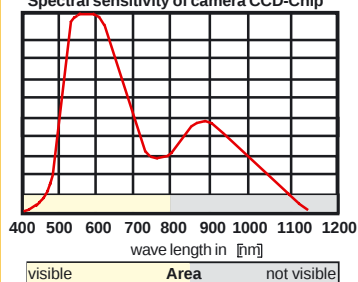

Dimension

360° horizontal
10-90° vertical/diagonal

