


1/3" b/w antivandalism dome cameras with 4,3mm fixed lens

Art. no. 15350V Model name VC-VKUP-42043 Version 420TVL 4,3mm fixed lens
Art. no. 15355V Model name VC-VKUP-60043 Version 600TVL 4,3mm fixed lens



VDE (E) EMC

**VC-Products
mean
high quality
and
reliability
with
German
engineering
and
design**

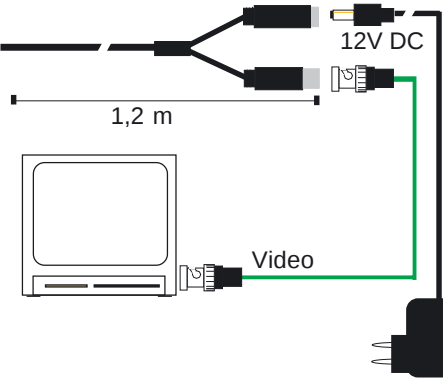


Standard packing:
b/w antivandalism camera with
4,3mm fixed lens and 1,2m
connection cable
equipped with: DC plug and
BNC socket for video

Accessories:
Stabilized power supply
12V DC/400mA (art.no. 20114)

Technical data

Resolution:(15350V).....	420TVL (512 x 582 Pixel)
(15355V).....	600TVL (752 x 582 Pixel)
Minimum illumination:.....	0,05 Lux / F 1,4
Pick-up device:(15350V).....	1/3" LG CCD-Chip
(15355V).....	1/3" Sharp CCD-Chip
Spectral area:.....	380 up to 1100nm wave lenght
Gamma correction:.....	0,45
Knee function:.....	yes, for edge enhancement
Signal to noise-ratio:.....	> 45 dB
AGC:.....	Max. 26 dB
Synchronisation:.....	Internal
Elektr. Shutter:.....	1/50 - 1/100000 sec.
Backlight compensation:.....	Yes (auto)
Smearing effect:.....	0,004%
LAG:.....	Zero
Scanning system:.....	CCIR, 625 lines, 50 Hz
Video output:.....	BAS 1 Vss / 75 Ohm
Power source / consumption:.....	12V DC, 0,1 A (reverse batterie protect.)
Environmental temperature:.....	-10 up to +50°C
Environmental humidity:.....	To 90%
Weight:.....	790 g
Measurements:(DxH).....	140 x 95 mm
Lens:.....	4,3mm / F2,0 (58° horizontal)
Lens mount holder:.....	12 mm lens holder
Iris:.....	Fixed
Focussing:.....	Manual (0,5m to ∞)
Specific features:.....	Auto. backlight function (BLC) Connection for LED illumination
Mounting reattachments:.....	Ceiling or wall mounting (3axial)
Mounting place:.....	Indoor and outdoor area (IP67)
Housing construction:.....	Shock-resistant metal housing (beige), dome Poly Karbonat
Camera housing typ:.....	For board cameras 1x 32x32 up to 2x 38x38mm

Spectral sensitivity of camera CCD-Chip

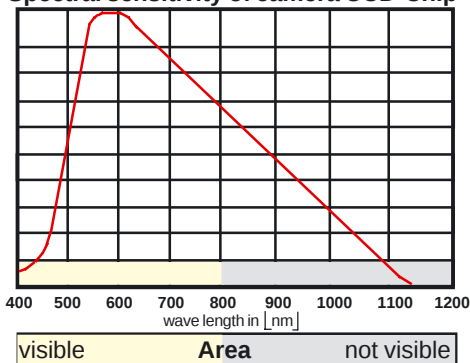

Open dome with board camera
and lens

