


1/3" b/w vandalism proofed dome camera with 4,3mm fixed lens

Art. no. 15400V Model name VC-VKUPP-42043

Version 420TVL 4,3mm fixed lens

Art. no. 15405V Model name VC-VKUPP-60043

Version 600TVL 4,3mm fixed lens

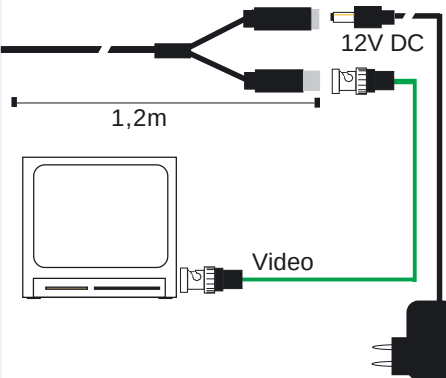

Standard packing:

b/w vandalism proofed dome camera with 4,3mm fixed lens and 1,2m connection cable equipped with:
DC plug and BNC socket for video

Necessary accessories:

stabilized power supply art.no. 20114

VDE **CE** **EMC**

**VC-Products
mean
high quality
and
reliability
with
German
engineering
and
design**

Technical datas

Resolution:(15400V).....	420 lines (512 x 582 pixel)
(15405V).....	600 lines (752 x 582 pixel)
Minimum illumination:.....	0,05 Lux / F 1,4
Pick-up device:(15400V).....	1/3" LG CCD-Chip
(15405V).....	1/3" Sharp CCD-Chip
Spectral sensitivity:.....	380 - 1100nm wave length
Gamma-correction:.....	0,45
Knee function.....	For edge enhancement
Signal-to-noise ratio:.....	> 45 dB
AGC:.....	Max. 26 dB
Synchronisation:.....	Internal
Automatic electrical shutter:.....	1/50 - 1/100000 sec.
Intelligent backlight compensation:.....	yes (auto)
Smeareffect:.....	0,004%
LAG:.....	Zero
Scanning system:.....	CCIR, 625 lines, 50 Hz
Video output:.....	BAS, 1 Vpp / 75 ohm
Power source / consumption:.....	12V DC / 0,1 A
Environmental temperature:.....	-10 to +50 °C
Environmental humidity:.....	Up to 90%
Weight:.....	250g
Lens:.....	4,3mm / F 2,0 (58° horizontal)
Lens mount:.....	12mm thread
Iris:.....	Fixed
Focussing:.....	Manual (0,5m up to unlimited)
Assembly reattachments:.....	Ceiling (2 achsial adjustment area)
Assembly place:.....	Indoor
Housing:.....	Impact resistant plastics housing (beige) Dome: poly carbonate
Camera typ:.....	For board cameras 32x32 and 42x42mm

Measurements

Spectral sensitivity of camera CCD-Chip

