


1/3" b/w vandalism proofed dome cameras with vario lens

Art. no. 15410V Model name VC-VKUPP-420-3/6
 Art. no. 15420V Model name VC-VKUPP-420-4/9
 Art. no. 15430V Model name VC-VKUPP-420-9/20
 Art. no. 15415V Model name VC-VKUPP-600-3/6
 Art. no. 15425V Model name VC-VKUPP-600-4/9
 Art. no. 15435V Model name VC-VKUPP-600-9/20

Version 420TVL 2,6-6mm vario lens
 Version 420TVL 4-9mm vario lens
 Version 420TVL 9-20mm vario lens
 Version 600TVL 2,6-6mm vario lens
 Version 600TVL 4-9mm vario lens
 Version 600TVL 9-20mm vario lens

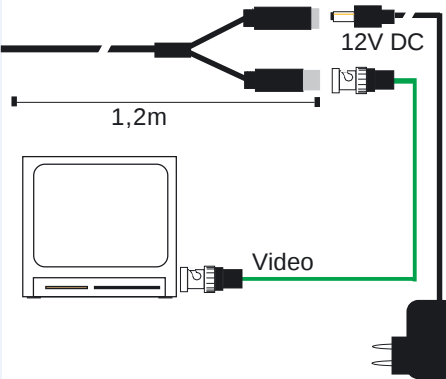

Standard packing:

b/w vandalism proofed dome cameras with vario lens and 1,2m connection cable equipped with:
 DC plug and BNC socket for video

Necessary accessories:

stabilized power supply art.no. 20114


VDE CE EMC

**VC-Products
 mean
 high quality
 and
 reliability
 with
 German
 engineering
 and
 design**

Technical datas

Resolution:(15410V, 15420V, 15430V)..... 420 lines (512 x 582 pixel)
 (15415V, 15425V, 15435V)..... 600 lines (752 x 582 pixel)
 Minimum illumination:..... 0,05 Lux / F 1,4
 Pick-up device:(15410V, 15420V, 15430V)..... 1/3" LG CCD-Chip
 (15415V, 15425V, 15435V)..... 1/3" Sharp CCD-Chip
 Spectral sensitivity:..... 380-1100nm wave length
 Gamma-correction:..... 0,45
 Knee function:..... For edge enhancement
 Signal-to-noise ratio:..... > 45 dB
 AGC:..... Max. 26 dB
 Synchronisation:..... Internal
 Automatic electrical shutter:..... 1/50 - 1/100000 sec.
 Intelligent backlight compensation:..... yes (auto)
 Smeareffect:..... 0,004%
 LAG:..... Zero
 Scanning system:..... CCIR, 625 lines, 50 Hz
 Video output:..... BAS, 1 Vpp / 75 ohm
 Power source / consumption:..... 12V DC / 0,1 A
 Environmental temperature:..... -10 to +50 °C
 Environmental humidity:..... Up to 90%
 Weight:..... 250g
 Lens:(15410V, 15415V)..... 2,6-6mm Vario (43-86° horizontal)
 (15420V, 15425V)..... 4-9mm Vario (30-62° horizontal)
 (15430V, 15435V)..... 9-22mm Vario (12-30° horizontal)
 Lens mount:..... 12mm thread
 Iris:..... Fixed
 Focussing:..... Manual (0,5m up to unlimited)
 Specials:..... Auto. Backlight Function (BLC)
 Vario lens
 Assembly reattachments:..... Ceiling (2 achsial adjustment area)
 Assembly place:..... Indoor
 Housing:..... Impact resistant plastics housing (beige)
 Dome: poly carbonate
 Camera typ:..... For board cameras 32x32 and 42x42mm

Spectral sensitivity of camera CCD-Chip

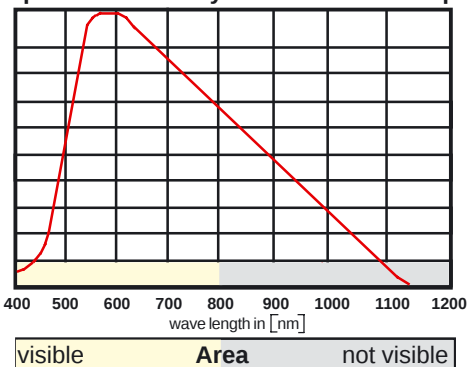

Measurements

