

1/3" color vandalism proofed dome cameras with 4,3mm fixed lens


Art. no. 15445V-NTSC Model name VC-VFKUPP-48043

Version 480TVL 4,3mm fixed lens



VDE (E) EMC

**VC-Products
mean
high quality
and
reliability
with
German
engineering
and
design**

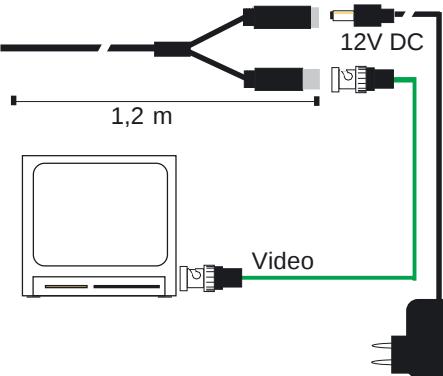

Standard packing:

color vandalism proofed dome camera
with 4,3mm fixed lens and
1,2m connection cable
equipped with:
DC plug and BNC socket for video

Technical data

Resolution:	480TVL (752 x 582 pixel)
Minimum illumination:	0,5 Lux / F 1,4
Pick-up device:	1/3" Sony Super HAD CCD-Chip
Spectral sensitivity:	380 to 1100nm wave length
Gamma-correction:	0,45
Knee function:	For edge enhancement
Signal-to-noise ratio:	> 45 dB
AGC:	Max. 26 dB
Synchronisation:	Internal
Electrical shutter:	1/50 - 1/100000 sec.
Intelligent backlight compensation:	Yes (auto)
Smeareffect:	0,004%
LAG:	Zero
Scanning system:	NTSC, 525 lines, 60 Hz
Video output:	FBAS 1 Vss / 75 Ohm
Power source/ consumption:	12 (8-18) V DC, 0,1 A (reverse batterie protect.)
Environmental temperature:	-10 to +50°C
Environmental humidity:	Up to 90%
Weight:	250 g
Measurements:(DxH):	125 x 80 mm
Lens:	4,3mm / F 2,0 (58° horizontal)
Lens mount:	12 mm thread
Iris:	Fixed
Focussing:	Manual (0,5m up to)
Specials:	Auto. Backlight Function (BLC)
Assembly reattachments:	Ceiling (2 achsial adjustment area)
Assembly place:	Indoor
Housing:	Impact resistant plastics housing (beige), Dome: poly carbonate
Camera typ:	For board cameras 32x32 and 42x42mm

Spectral sensitivity of camera CCD-Chip

