


1/3" color vandalism proofed dome cameras with vario lens

Art. no. 15450V	Model name VC-VFKUPP-380-3/6	Version 380TVL 2,6-6mm vario lens
Art. no. 15460V	Model name VC-VFKUPP-380-4/9	Version 380TVL 4-9mm vario lens
Art. no. 15470V	Model name VC-VFKUPP-380-9/22	Version 380TVL 9-22mm vario lens
Art. no. 15455V	Model name VC-VFKUPP-480-3/6	Version 480TVL 2,6-6mm vario lens
Art. no. 15465V	Model name VC-VFKUPP-480-4/9	Version 480TVL 4-9mm vario lens
Art. no. 15475V	Model name VC-VFKUPP-480-9/22	Version 480TVL 9-22mm vario lens



VDE (E) EMC

**VC-Products
mean
high quality
and
reliability
with
German
engineering
and
design**

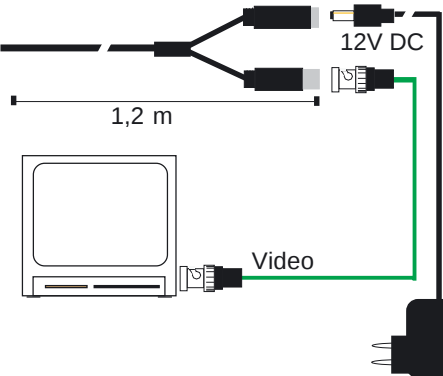

Standard packing:

color vandalism proofed dome camera
with vario lens and 1,2m connection
cable
equipped with:
DC plug and BNC socket for video

Necessary accessories:

stabilized power supply art.no. 20114

Technical data

Resolution:(15450V, 15460V, 15470V).....	380TVL (512 x 582 pixel)
(15455V, 15465V, 15475V).....	480TVL (752 x 582 pixel)
Minimum illumination:.....	0,5 Lux / F 1,4
Pick-up device:.....	1/3" Sony Super HAD CCD-Chip
Spectral sensitivity:.....	380 to 800nm wave length
Gamma-correction:.....	0,45
Knee function:.....	For edge enhancement
Signal-to-noise ratio:.....	> 45 dB
AGC:.....	Max. 26 dB
Synchronisation:.....	Internal
Electrical shutter:.....	1/50 - 1/100000 sec.
Intelligent backlight compensation:.....	Yes (auto)
Smeareffect:.....	0,004%
LAG:.....	Zero
Scanning system:.....	PAL, 625 lines, 50 Hz
Video output:.....	FBAS 1 Vss / 75 Ohm
Power source/ consumption:.....	12 (8-18) V DC, 0,1 A (reverse batterie protect.)
Environmental temperature:.....	-10 to +50°C
Environmental humidity:.....	Up to 90%
Weight:.....	790 g
Measurements:(DxH).....	125 x 80 mm
Lens:(15450V, 15455V).....	2,6-6mm vario (43-86° horizontal)
(15460V, 15465V).....	4-9mm vario (30-62° horizontal)
(15470V, 15475V).....	9-22mm vario (12-30° horizontal)
Lens mount:.....	12 mm thread
Iris:.....	Fixed
Focussing:.....	Manual (0,5m up to ∞)
Specials:.....	Auto. Backlight Function (BLC) Vario lens
Assembly reattachments:.....	Ceiling (2 achsial adjustment area)
Assembly place:.....	Indoor
Housing:.....	Impact resistant plastics housing (beige), Dome: poly carbonate
Camera typ:.....	For board cameras 32x32 and 42x42mm

Spectral sensitivity of camera CCD-Chip

