

Video components....

Designed for professional video systems




Art: 15500

Technical data

Resolution:.....	550TVL (752x582 pixel) (color) 600TVL (752x582 pixel) (b/w)
Minimum illumination:.....	0,2 Lux / F 1,4 (color) 0,0001 Lux / F 1,4 (b/w, FIT on)
Pick-up device:.....	1/3" Sony Double Scan CCD-Chip
Signal working:.....	Digital (DSP)
Spectral sensitivity:.....	380-800nm wave length (color) 380-1100nm wave length (b/w)
OSD-Menue:.....	WDR function (20-fold) 3-fold AGC, frame integration (FIT/ DSS) to 160-fold, 4x privacy zones, ID and text display, continuous screen control, manual shutter, white balance, backlight (15-fold), sharpness adjustment, 3-fold digital zoom, time and illumination conditioned switching (IR pan filter), mirror pictures (h/v), RS-485 interface (Pelco D) and RESET function
Interface:.....	RS-485 (Pelco D)
Signal-to-noise ratio:.....	>48 dB (AGC off)
Synchronisation:.....	Internal
Electr. shutter:.....	1/50 - 1/100000 sec.
Smear effect:.....	0,005%
LAG:.....	Zero
Scanning system:.....	PAL, 625 lines, 50 Hz
Video output:.....	FBAS 1 Vss / 75 Ohm
Power source / consumption:.....	12V DC, 0,3 A
Environmental temperature:.....	-10 up to +50 °C
Environmental humidity:.....	Up to 90%
Electrical safety VDE:.....	EN 60065+60950
EMC:.....	EN 50081+82, CE certification
Maximum vibration:.....	8 G
Mounting attachments:.....	1/4" thread
Weight:.....	300g
Dimension (WxHxD):.....	62 x 62 x 140mm
Lens:.....	CS-Mount and C-Mount
OSD programming:.....	Button (behind covering)

VDE CE EMC

Spectral sensitivity of camera
CCD-Chip

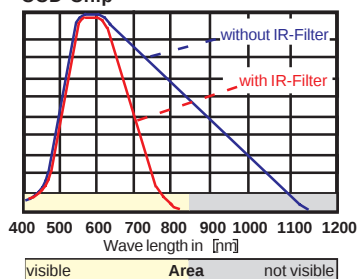

Back view



Side view



Scope of delivery:

OSD day/night camera with WDR
4pin lens connector
Interfaces connection cable

Recommended accessories:

Stabilized power supplied 12V DC / 1,3 A
(art.no. 20114S)
All lenses, mountings and protection housing