


1/3" color dome camera with 4,3mm fixed lens

Art. no. 15503 Model name VC-FKUP-550-OSDDNR Version 550TVL 4,3mm fixed lens



VDE **CE** **EMC**

**VC-Products
mean
high quality
and
reliability
with
German
engineering
and
design**

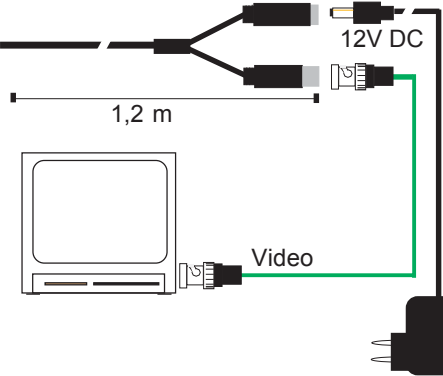


Standard packing:
color dome camera with 4,3mm
fixed lens and 1,2m connection
cable
equipped with: DC plug and
BNC socket for video

Accessories:
Stabilized power supply
12V DC/400mA (art.no. 20114)

Technical data

Resolution:(15510-IR).....	550TVL (752 x 582 Pixel)
Minimum illumination:.....	0,5 Lux / F 1,4
Pick-up device:.....	1/3" Sony Super HAD CCD-Chip
Signal working:.....	Digital (DSP)
Spectral area:.....	380 up to 800nm wave lenght
OSD menue settings:.....	continous focus adjustment, shutter, white balance, 3-fold backlight, 3-fold AGC, 3-fold DNR, FIT to 128-fold, words display, 4x motion, 4x private zones areas, mirror image and continous focus adjustment
Signal to noise-ratio:.....	> 50 dB (AGC off)
Synchronisation:.....	Internal
Elektr. Shutter:.....	1/50 - 1/120000 sec.
Smearing effect:.....	0,004%
LAG:.....	Zero
Scanning system:.....	PAL, 625 lines, 50 Hz
Video output:.....	FBAS 1 Vss / 75 Ohm
Power source / consumption:.....	12 (9-16) V DC, 0,2 A (reverse batterie protect.)
Environmental temperature:.....	-10 up to +55°C
Environmental humidity:.....	To 90%
Electrical safety:.....	EN 60065+60950 VDE
EMC:.....	EN 50081+82, CE-certification
Maximum vibration:.....	8 G
Assembly reattachments:.....	4 holes 2mm Ø - hole distance 38mm
Weight:.....	230 g
Measurements:(DxH).....	117 x 83 mm
Lens:.....	4,3mm / F2,0 (58° horizontal)
Lens mount holder:.....	12mm lens holder
Iris:.....	OSD menue
Focussing:.....	Manual (0,5m bis)

Spectral sensitivity of camera CCD-Chip

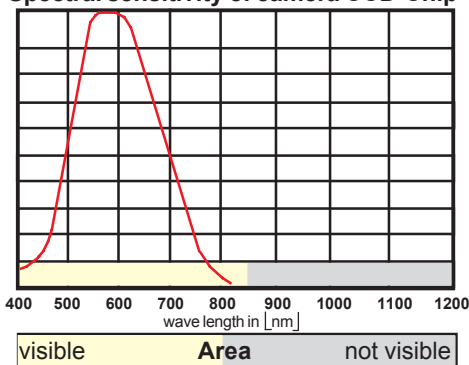

Open dome with board camera
and DC-Vario lens

