

1/3" water proofed color camera (IP65) with lens and mounting in build-up resp. base frame housing to the fastening on vehicle


Art. no. 15770 Model name VC-K-EGGSHELL Version 380TVL



**VC-Products
mean
high quality
and
reliability
with
German
engineering
and
design**

VDE CE EMC

Spectral sensitivity of camera CCD-Chip

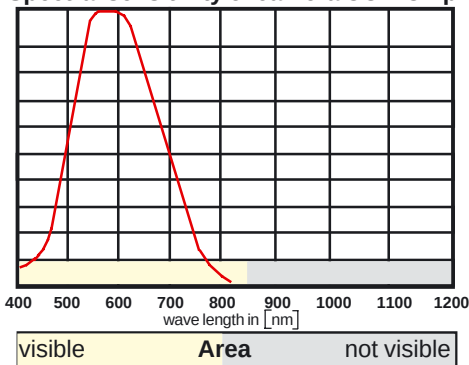

Technical datas

Resolution:	380TVL (500x582 Pixel)
Minimum illumination:	0,3 Lux / F 1,4
Pick-up device:	1/3" CCD-Chip Sharp
Automatic white balance:	2100-9100°K (Auto)
Enhancer:	Horizontal and Vertikal
Gamma-correction:	0,45
Knee function:	For edge enhancement
Signal-to-noise ratio:	> 50 dB
AGC:	4 dB - 30 dB (Auto)
Synchronisation:	Internal
Electr. shutter:	1/50 - 1/100000 sec.
Intelligent backlight compensation:	Auto Backlight Compensation
Smeareffect:	0,005%
LAG:	Zero
Scanning system:	PAL, 625 lines, 50 Hz
Video output:	FBAS 1 Vss / 75 Ohm
Power source / consumption:	12 (9-15) V DC, 0,1 A (rev. batterie protect.)
Environmental temperature:	-10 up to +50°C
Environmental humidity:	To 95%
Electrical safety VDE:	EN 60065+60950
EMC:	EN 50081+82, CE certification
Max. vibration:	8 G
Mounting attachments:	Housing
Weight:	150 g
Lens:	2,9 mm/ F 2,0 (80° horizontal)
Lens mount holder:	12 mm thread
Iris:	Electronic
Focussing:	Manual (0,5m bis ∞)
Special funktion:	Reflection

Standard packing:

Vehicle color camera with 2,9mm lens (12mm thread) with 0,3m connection cable with 3pol. mini socket and 5m extension with 3pol. mini plug, BNC socket and DC plug.

Accessories:

Stabilized power supply 12V DC / 1,3 A (Art.no. 20114S)

Inside view:

