



Digital video sensor (design board 32x32mm)

Art. No. 20039 Model name VC-PCMD

Connection

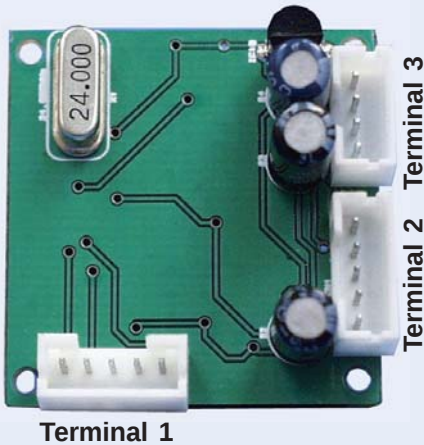

Mounting

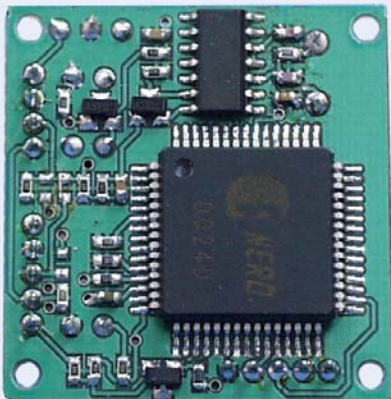


VDE (E) EMC

Technical data

Processor:	8bit ADC
Circuitry stabilized by:	Separate synchronisation
Alarm output:	5V / 0,5V (1-5 seconds)
Sabotage detection:	Video level interpretation
Sensor:	1 sensor face
Sensitivity measurement:	4 steps adjustable
Measurement of difference:	2 or 3 half images (optional)
Program setup:	about link
Scanning system:	CCIR, 625 lines, 50 Hz
Video input signal:	FBAS 1 Vpp / with to loop in output
Audio signal:	to loop in connection
Power source / consumption:	12 V DC, 0,1 A
Environmental temperature:	-10 up to +50 °C
Environmental humidity:	Up to 95%
Electrical safety VDE:	EN 60065+60950
ENC:	EN 50081+82, CE certification
Maximum shock:	80 G
Maximum vibration:	8 G
Mounting attachments:	4 bore hole 2 mm Ø - hole distance 28mm
Weight:	10 g
Measurements:	32 x 32 mm board

Necessary accessories: Board camera and power supply 12V DC

Pickaback assembly

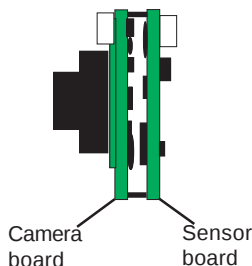

Plug complete cabling

(Connection cable with plug for T1, T2 and T3)

