

Outdoor domes with or without built-in p/t head

Art. no. 20602	Model name VC-SN-DOME9W	Version	Internal space for camera 180 mm
Art. no. 20661	Model name VC-DOME-HB9	Version	w/o built-in p/t head
Art. no. 20603	Model name VC-SN-DOME12W	Version	Internal space for camera 230 mm
Art. no. 20662	Model name VC-DOME-HB12	Version	w/o built-in p/t head
Art. no. 20623	Model name VC-SN-DOME14W	Version	Internal space for camera 310 mm
Art. no. 20690	Model name VC-SN-DOME16W	Version	Internal space for camera 350 mm

Accessories

Art. no. 20625	Model name VC-WD-DOME-BEIGE	Version	Wall mount for dome housing
Art. no. 20616	Model name VC-EWH-30-BEIGE	Version	Corner bracket for wall mount
Art. no. 20613	Model name VC-MAWH-30-BEIGE	Version	Pole bracket for wall mount
Art. no. 20626	Model name VC-DH-DOME-BEIGE	Version	Ceiling mount for dome housing
Art. no. 20627	Model name VC-DH-DOME-EX-BEIGE	Version	Extension for ceiling bracket
Art. no. 20628	Model name VC-BGSN-24/230	Version	Remote control for 1 p/t head dome



Technical data








P/T head max. load:	7 kg for camera + lens
Mounting location:	Outdoor (IP66)
Horizontal rotation angle:	350°
Vertical rotation angle:	20 - 90°
Rotation speed:	6° / sec. horz. 4° / sec. vertical
Rotation torque:	5,5 Nm
Stop position horizontal:	Adjustable (10 - 350°)
Operating voltage:	24 V AC via remote control
Consumption:	10 Watt
Operation temperature:	-35 bis +60° C
Protection standard acc. to VDE:	IP66 / Kl. 1
EMC:	equal EN 50081-1, EN 55022 class B
EMI:	equal EN 50081-2, IEC 801
Safety electrical:	equal EN 60950, EN 60065
Camera mount:	Mounting platform
Own weight	Art.no.20602 / 20661: 5 kg
	Art.no.20603 / 20662: 6 kg
	Art.no.20623: 7 kg
	Art.no.20690: 8 kg
Measurements	Art.no.20602 / 20661: Dome 9" H= 350 mm Ø= 330 mm
	Art.no.20603 / 20662: Dome 12" H= 410 mm Ø= 380 mm
	Art.no.20623: Dome 14" H= 450 mm Ø= 420 mm
	Art.no.20690: Dome 16" H= 480 mm Ø= 450 mm
Housing:	ALU sheet
Housing color:	beige
Connections via:	Terminal screw

Mount max. load:	30 kg
Own weight	Art.no.20625: 1,10 kg
	Art.no.20616: 2,40 kg
	Art.no.20626: 3,25 kg
	Art.no.20626: 1,85 kg
	Art.no.20627: 1,30 kg
Measurements	Art.no.20625: B= 80 H= 150 L1= 300 L2= 255mm
	Art.no.20616: B= 195 H= 220 T= 120 mm
	Art.no.20613: B= 225 H= 180 T= 135 mm
	Art.no.20626: L= 500 mm Ø= 190 mm ceiling Ø= 115 mm dome
	Art.no.20627: L= 500 mm Ø= 35 mm


Remote control:	Metal case beige coated
Power source	Art.no.20628: 230 V AC via line cord, 30 Watt
	Art.no.20629: 230 V AC via line cord, 40 Watt
Control voltage	(for p/t head): 24 V AC via 6pin DIN female
	(for zoom): 6-15 V DC via 5pin DIN female (adjustable)
Measurements	Art.no.20628: T= 210 H= 60 B= 260 mm

VDE CE EMC

Accessories

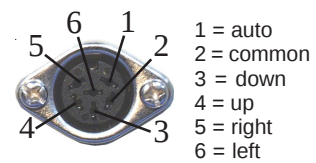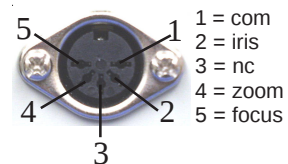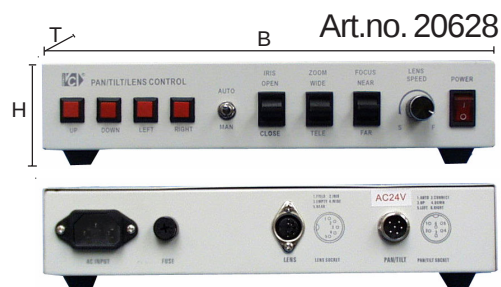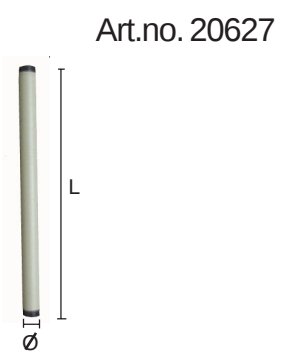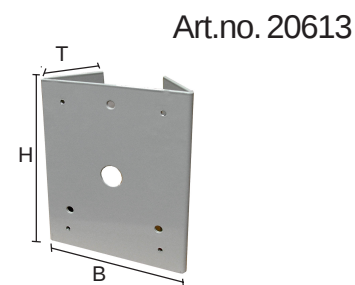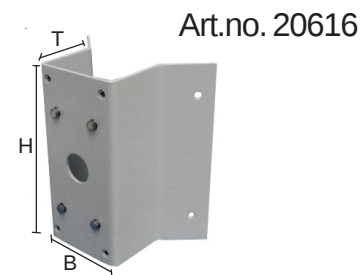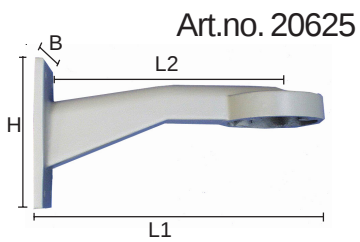

Connections

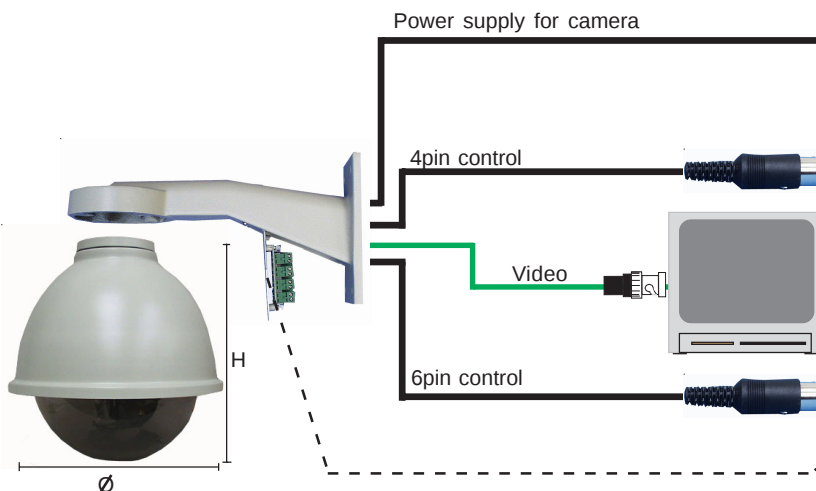

Available terminal connection bar
Wall mount art.no. 20625

