


Universal keypad with integrated twisted pair interface

Art. No. 20607 Model name. VC-CON-MDK-16S

Version 16 addresses, 2axial joystick

Controls

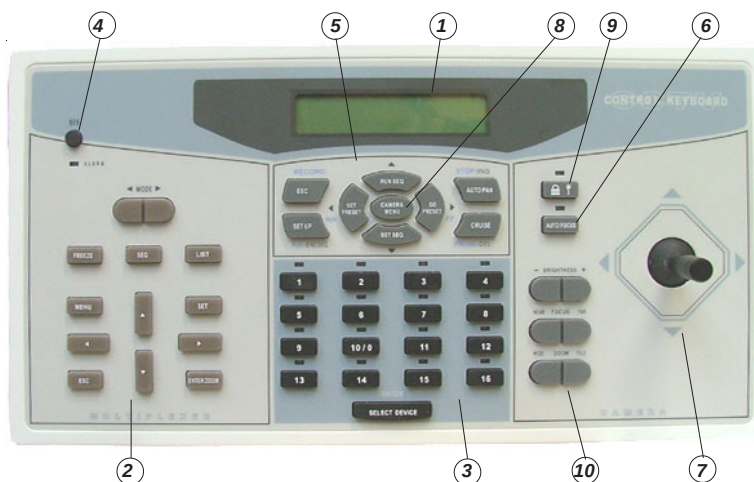

- ① 2 line LCD display for communication with selected devices (multiplexer, speed dome, matrix, recorder) incl. status
- ② Selection button
- ③ Selection cameras
- ④ System programming button
- ⑤ Programming area / recorder operation
- ⑥ Auto focus button
- ⑦ Joystick (2 axial)
- ⑧ Cursor bearing button for OSD programming of the camera
- ⑨ Operation lock
- ⑩ Selection button - brightness, focus, zoom

Technical data

Operation via controller of:

Speed dome camera: all functions
 OSD camera: all functions
 Motor zoom lens camera: all functions
 All functions
 All functions
 All functions
 Max. 16 system addresses
 RS485(semi-duplex) /422(full-duplex), RS232
 DC mini socket
 RJ-11 (6P6C) up to 1000m distance
 9-pin D-sub ,female
 12 V DC (-15/+15%)
 5W
 EN 60065+60950 , EN 50081+82
 1,7 kg
 0°C ~ 50°C
 10%~90% RH, not condensing
 Power supply 12V DC, RS-485,
 connection cable 3m with RJ-11 plug

VDE CE EMC


Measurements

W: 330 mm
 H: 68 mm
 D: 175 mm

Ports

Environments

Video multiplexer
 Video matrix
 Video recorder
 Connections:
 Signal
 Power
 RS-485
 RS-232
 Input voltage
 Capacity
 Electrical safety
 Weight
 Operating temp.
 Humidity
 Supplied accessories

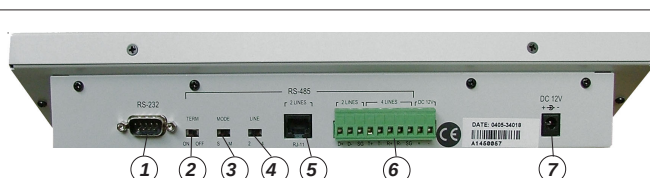

- ① RS-232 female, 9pin D-sub
- ② Termination impedance switchable
- ③ Master / slave switching
- ④ Semi / full duplex function
- ⑤ RS 485, RJ-11 plug
- ⑥ RS 485, 12V DC connection bar
- ⑦ 12V DC socket