


## Universal keypad with integrated twisted pair interface

Art. No. 20612 Model name. VC-CON-MDK-255H

Version 255 addresses, 3axial joystick

### Controls

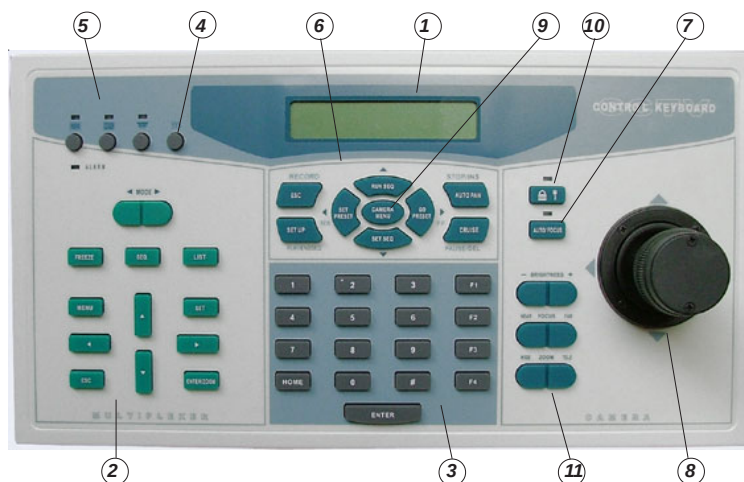

- ① 2 line LCD display for communication with selected devices (multiplexer, speed dome, matrix, recorder) incl. status
- ② Selection button
- ③ Selection cameras
- ④ System programming button
- ⑤ Selection button - matrix, multiplexer, camera
- ⑥ Programming area / recorder operation
- ⑦ Auto focus button
- ⑧ Joystick (3 axial)
- ⑨ Cursor bearing button for OSD programming of the camera
- ⑩ Operation lock
- ⑪ Selection button - brightness, focus, zoom

### Technical data

Operation via controller of:

Speed dome camera: all functions  
 OSD camera: all functions  
 Motor zoom lens camera: all functions  
 All functions  
 All functions  
 All functions  
 Max. 255 system addresses  
 RS485(semi-duplex) /422(full-duplex), RS232  
 DC mini socket  
 RJ-11 (6P6C) up to 1000m distance  
 9-pin D-sub ,female  
 12 V DC (-15/+15%)  
 5W  
 EN 60065+60950 , EN 50081+82  
 1,7 kg  
 0°C ~ 50°C  
 10%~90% RH, not condensing  
 Power supply 12V DC, RS-485,  
 connection cable 3m with RJ-11 plug

VDE CE EMC


### Measurements

W: 330 mm  
 H: 68 mm  
 D: 175 mm

#### Ports

#### Environments

Video multiplexer  
 Video matrix  
 Video recorder  
 Connections:  
 Signal  
 Power  
 RS-485  
 RS-232  
 Input voltage  
 Capacity  
 Electrical safety  
 Weight  
 Operating temp.  
 Humidity  
 Supplied accessories

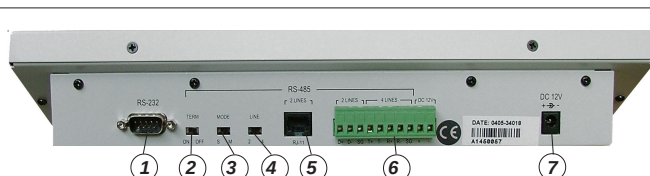

- ① RS-232 female, 9pin D-sub
- ② Termination impedance switchable
- ③ Master / slave switching
- ④ Semi / full duplex function
- ⑤ RS 485, RJ-11 plug
- ⑥ RS 485, 12V DC connection bar
- ⑦ 12V DC socket