

# Pan/Tilt heads

## Pan/tilt heads for outdoor, remote control and mounts

|                  |                            |         |                               |
|------------------|----------------------------|---------|-------------------------------|
| Art. no. 20624   | Model name VC-SN-15OUT     | Version | P/T head for outdoor          |
| Art. no. 20615   | Model name VC-WASN-30BEIGE | Version | Wall mount for P/T head       |
| Art. no. 20616-A | Model name VC-EWH-30BEIGE  | Version | Corner mount for 20615        |
| Art. no. 20613-A | Model name VC-MAWH-30BEIGE | Version | Pole mount for 20615          |
| Art. no. 20628   | Model name VC-BGSN-24/230  | Version | Remote control for 1 P/T head |

Art.no. 20624



Art.no. 20615





Art.no. 20616-A



Art.no. 20613-A



Art.no. 20628

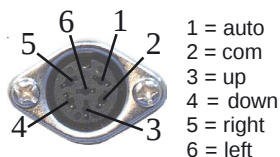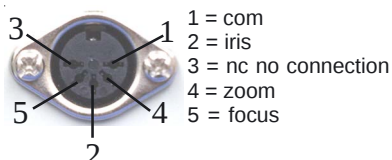

### Technical data

|                                         |                                    |
|-----------------------------------------|------------------------------------|
| P/T head max. limit load:               | 15 kg                              |
| Assembly:                               | Outdoor                            |
| Horizontal angle:                       | 350°                               |
| Vertical angle:                         | 20 - 90°                           |
| Rotational speed:                       | 6° / sec. horz. 3° / sec. vertical |
| Torque:                                 | 10 Nm                              |
| Angle:                                  | 0,3°                               |
| Final position horizontal:              | adjustable (10 - 350°)             |
| Voltage:                                | 24 V AC remote controle            |
| Engine power:                           | 25 Watt                            |
| Environmental temperature:              | -35 up to +60° C                   |
| Protection class acc. to VDE:           | IP67 / class 1                     |
| EMC:                                    | EN 50081-2, IEC 801                |
| Electrical safety:                      | EN 60950, EN 60065                 |
| Camera fixing:                          | Mounting stage                     |
| Weight:                                 | 9,3 kg                             |
| Measurements (HxBxT):                   | 260 x 225 x 180 mm                 |
| Kind of housing:                        | ALU diecasting                     |
| Color of housing:                       | beige                              |
| Woatherproofed 7pol. connection female: | 7pol. plug (terms of supply)       |

|                            |                                         |
|----------------------------|-----------------------------------------|
| Remote control:            | Metal housing beige coated              |
| Voltage art.no.20628:      | 230 V AC connection cable, 30 Watt      |
| Voltage (for P/T head):    | 24 V AC 6pol. DIN female                |
| (for zoom):                | 6-15 V DC 5pol. DIN female (adjustable) |
| Measurements Art.no.20628: | T= 210 H= 60 B= 260 mm                  |

|                            |                           |
|----------------------------|---------------------------|
| Brackets max. limit load:  | 30 kg                     |
| Measurements Art.no.20615: | B= 70 L= 360 mm H= 115 mm |
| Art.no.20616-A:            | B= 195 H= 220 T=120 mm    |
| Art.no.20613-A:            | B= 180 H= 225 T= 135 mm   |

### Connections

