

High resolution b/w monitor(700TVL) with 2way switcher

Art. no. 20710 Model name VC-MA5BW-2SA



VDE CE EMC

Technical data


Operator elements:	CONTRAST, BRIGHTNESS, VERTIKAL, SWITCH TIME, VOLUME, 50/60Hz, power
Picture tube:	6" respectively 15cm
Resolutin:	700 TV line 8,75 MHz
Video reinforcing:	30 dB
Geometric contortion:	+/- 2%
Stabilized high voltage:	10 KV / +/- 500 V / 90%
Signal to noise distance:	>52 dB
Synchronisation:	Internal, BAS
Speaker power:	Max.1 W
Scanning systems:	CCIR / EIA switchable
A/V-switcher (man. or auto):	2-20 sec.
Voltage:	230 V power supply 15V DC/1,2A
2x videoinput (RCA female):	BAS 0,5 - 1,5 Vpp / 75 Ohm
2x audioinput (RCA female):	Line 0,7 Vrms / 1kOHM
2x12V DC at DC-female:	For cameras
Videoooutput (RCA-female):	Recorder recording
Audiooutput (RCA-female):	Recorder recording
Environmental temperature:	0 up to +40 °C
Environmental humidity:	To 90% (without condensation)
Measurements:	195 x 160 x 210mm (W x H x D)
Weight:	2 Kg (2,3 Kg with package)
Area of application:	For all application
Housing direction:	Kunststoff
Color:	Pale grey
Electrical safety (VDE):	EN60065+60950 / IP40 / class 1
EMC:	EN 50081-1, EN 50022 class B
EMI:	EN 50082-2, IEC-801
MTBF:	25.000 hours

Standard packing:

B/W monitor with integrated 2way switcher for audio and video.
Power supply 230V AC / 15V DC / 1,5A
Adapter chinch on BNC female

System setup

Equipment with videorecorder

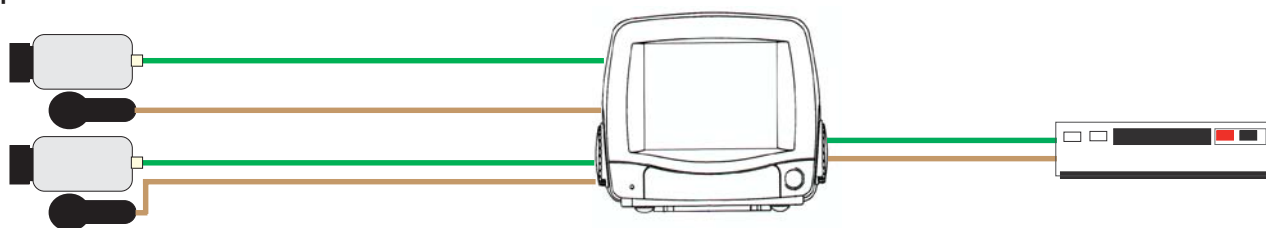

Equipment with many monitors

