


## 1/3" b/w dome camera with fixed lens

Art. no. 20910

Model name VC-KUP90WIDE-600

Version 600TVL

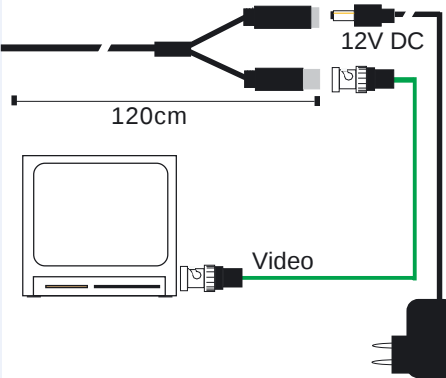

### Standard packing:

b/w dome camera with 2,9mm lens and 1,2m connection cable equipped with:  
DC plug and BNC socket for video

### Necessary accessories:

stabilized power supply art.no. 20114  
wall mount for indoor art.no. 20167  
wall mount for outdoor art.no. 14019  
ceiling mount for outdoor art.no. 14020

**VDE** **CE** **EMC**



**VC-Products  
mean  
high quality  
and  
reliability  
with  
German  
engineering  
and  
design**

### Technical datas


Horizontal resolution:..... 600 lines (752 x 582 pixel)  
Minimum illumination:..... 0,05 Lux at F 1,4  
Pick-up device:..... 1/3" Charp CCD-Chip  
Spectral sensitivity:..... 380 - 1100 nm wave length  
Enhancer:..... Horizontal  
Gamma-correction:..... 0,45  
Knee function:..... For edge enhancement  
Signal-to-noise ratio:..... > 45 dB  
AGC:..... 26 dB  
Synchronisation:..... Internal  
Automatic electrical shutter:..... 1/50 - 1/100000 sec.  
Intelligent backlight compensation:..... yes  
Smeareffect:..... 0,004%  
LAG:..... Zero  
Scanning system:..... CCIR, 625 lines, 50 Hz  
Video output:..... BAS, 1 Vpp / 75 ohm  
Power source / consumption:..... 12 (9-15) V DC / 0,1 A  
Environmental temperature:..... -10 to +50 °C  
Environmental humidity:..... Up to 95%  
Electrical safety:..... EN 60065+60950 VDE  
EMC:..... EN 50081+82, CE-certification  
Maximum vibration:..... 8 G  
Assembly reattachments:..... 4 slots  
Weight:..... 150g  
Lens:..... 2,9mm / F 2,0 (80° horizontal)  
Lens mount:..... 12mm thread  
Iris:..... Fixed  
Focussing:..... Manual (0,5m up to unlimited)

### Measurements


Spectral sensitivity of camera CCD-Chip

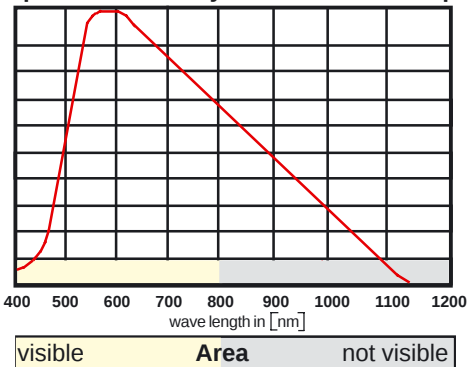

with wall mount for indoor



with ceiling mount for outdoor



with wall mount for outdoor

